

CENTURY WOOD HD PORCELAIN TILE



CENTURY WOOD HD PORCELAIN TILE



6" x 36" CENTURY WOOD DUNE HD RECTIFIED PORCELAIN TILE

CENTURY WOOD HD PORCELAIN TILE



6" x 36" CENTURY WOOD ASH HD RECTIFIED PORCELAIN TILE

CENTURY WOOD HD PORCELAIN TILE



6" x 24" CENTURY WOOD SADDLE HD RECTIFIED PORCELAIN TILE

CENTURY WOOD HD PORCELAIN TILE



6" x 36" CENTURY WOOD DUNE HD RECTIFIED PORCELAIN TILE
62-722




6" x 24" CENTURY WOOD DUNE HD RECTIFIED PORCELAIN TILE
62-526



6" x 36" CENTURY WOOD ASH HD RECTIFIED PORCELAIN TILE
62-721



6" x 24" CENTURY WOOD ASH HD RECTIFIED PORCELAIN TILE
62-525

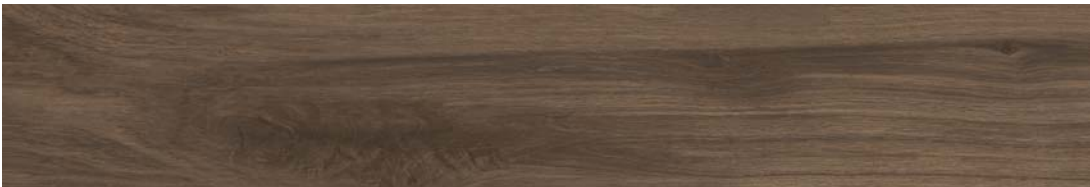

6" x 36" CENTURY WOOD SADDLE HD RECTIFIED PORCELAIN TILE
62-720



6" x 24" CENTURY WOOD SADDLE HD RECTIFIED PORCELAIN TILE
62-524

CENTURY WOOD HD PORCELAIN TILE



6" x 36" CENTURY WOOD CINNAMON HD RECTIFIED PORCELAIN TILE
62-719



6" x 24" CENTURY WOOD CINNAMON HD RECTIFIED PORCELAIN TILE
62-523



6" x 24" CENTURY WOOD CINNAMON HD RECTIFIED PORCELAIN TILE

CENTURY WOOD HD PORCELAIN TILE

PACKAGING INFORMATION

| DESCRIPTION | ITEM CODE | | | | LBS/BOX | PCS/BOX | SQFT/BOX | BOXES/SKID | SQFT/SKID |
|---|-----------|--------|--------|----------|---------|---------|----------|------------|-----------|
| | DUNE | ASH | SADDLE | CINNAMON | | | | | |
| 6" x 24" CENTURY WOOD HD RECT. PORC. TILE | 62-526 | 62-525 | 62-524 | 62-523 | 46.20 | 11 | 10.32 | 48 | 495.36 |
| 6" x 36" CENTURY WOOD HD RECT. POR TILE | 62-722 | 62-721 | 62-720 | 62-719 | 39.00 | 6 | 8.51 | 60 | 510.60 |

GENERAL SPECIFICATIONS

| DESCRIPTION | METHOD | UNIT | 6" x 24" | 6" x 36" |
|--------------------------------------|-----------------|---------|---------------------|---------------------|
| THICKNESS | | mm – in | 9.8 mm – 3/8 in | 11 mm – 7/16 in |
| WATER ABSORPTION | EN ISO 10545-3 | (%) | ≤ 0.5 | ≤ 0.5 |
| ABRASION RESISTANCE | EN ISO 10545-7 | (PEI) | 4 | 4 |
| SCRATCH HARDNESS | | (Mohs) | 7 | 7 |
| BREAKING STRENGTH | EN ISO 10545-4 | (lbf) | ≥ 292 | ≥ 292 |
| CHEMICAL RESISTANCE | EN ISO 10545-13 | (GL) | Class A – Resistant | Class A – Resistant |
| FROST RESISTANCE | EN ISO 10545-12 | | Resistant | Resistant |
| STATIC COEFFICIENT OF FRICTION (WET) | ASTM C-1028 | (μ) | ≥ 0.80 | ≥ 0.80 |
| STATIC COEFFICIENT OF FRICTION (DRY) | ASTM C-1028 | (μ) | ≥ 0.90 | ≥ 0.90 |
| DCOF (WET) | ANSI B101.3 | | ≥ 0.60 | ≥ 0.60 |
| SHADE VARIATION | | | V2 | V2 |