

COMMERCIAL



150 Cinnamon Walnut

MULTI-FAMILY



556 Smoky Oak

RESIDENTIAL



142 Gray Barnwood

**THE EXPECTED DEPENDABILITY OF SHAW LVT
ENGINEERED FOR EVEN HIGHER PERFORMANCE**

Our hardest working resilient flooring, Floorté PRO is constructed to endure the most demanding environments. This product is designed for exceptional dimensional stability with a performance core that is denser and resists even more impact.



ENHANCED DURABILITY
Floorté PRO will perform under heavy foot traffic and stationary loads up to 2,000 PSI.



IMPROVED DIMENSIONAL STABILITY
For areas with intensified temperature from sunlight, there will be reduced expansion and contraction.



MINIMIZED TELEGRAPHING
Floorté PRO minimizes the appearance of subfloor imperfections.



MINIMAL SUBFLOOR PREP
Floorté PRO is designed to mitigate issues with subfloors that need a lot of prep work.




SILENT TREATMENT
acoustical pad

PATENT PENDING ATTACHED ACOUSTICAL PAD
Faster installation & sound reduction – up to 71 IIC / 63 STC (concrete) and up to 50 IIC / 58 ST (gypsum concrete).



PROVEN ATTRIBUTES
Waterproof/Water Resistant
ArmourBead™ Finish
Low Maintenance
Click & Glue Down Installation

ENDURA

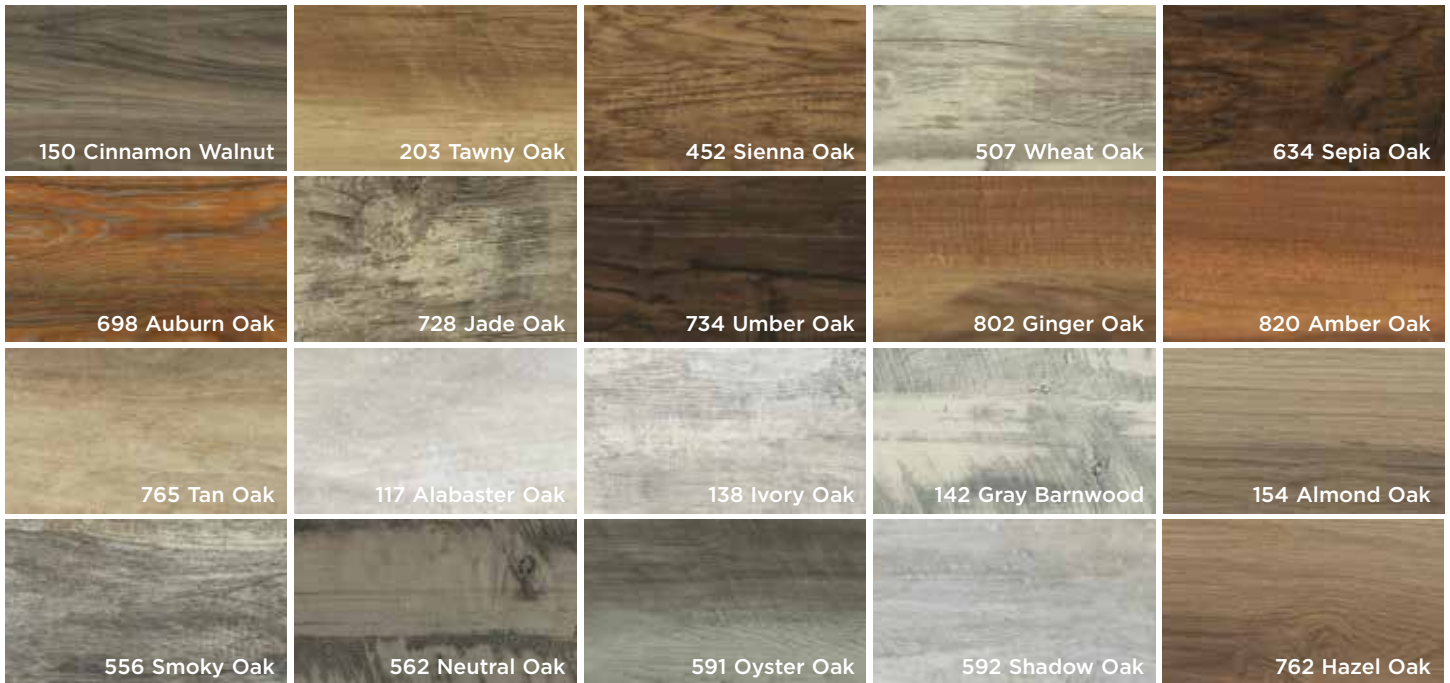

Style Number	ENDURA 512C PLUS 0736V	ENDURA 512G PLUS 0802V
Size	7" x 48"	7" x 48"
Thickness	4.8 mm	4.5 mm
Wear Layer	12 mil	12 mil
Finish	ArmourBead	ArmourBead
Edge Description	Micro Bevel	Micro Bevel
SF Per Carton	18.68 SF	27.99 SF
SF Per Pallet	1,494.36 SF	1,539.45 SF
Installation	Click	Direct Glue

0736V Endura 512C Plus Trim

0802V Endura 512G Plus Trim

Multi-Purpose Reducer*	T-Molding*	Quarter Round	Stair Nose*	Omni Trim	Quarter Round	Stair Nose
VSMR	VSTMD	VSQTR	VSSTN	VSUN1	VSQT1	VSSN1
72" L	72" L	94" L	94" L	72" L	94" L	94" L

Adhesives for Endura 512G

Style Name	Style Number		
Shaw 200	052VS 1 gal	026VS 4 gal	
Kwikflash	081VS 1 gal	080VS 4 gal	
Shaw 4100	073VS 1 gal	312VS 4 gal	



Warranty

* Packaged with Molding Track