



(caicos™)

a collection of glass mosaics




crane beach

12½"x13"



Prepare to be swept away by the glistening, mottled seascape colors of Caicos glass mosaics by Marazzi USA . . . be transported by this modern art glass to places out of the ordinary whether within a residence, a favorite restaurant, an exciting entertainment venue.

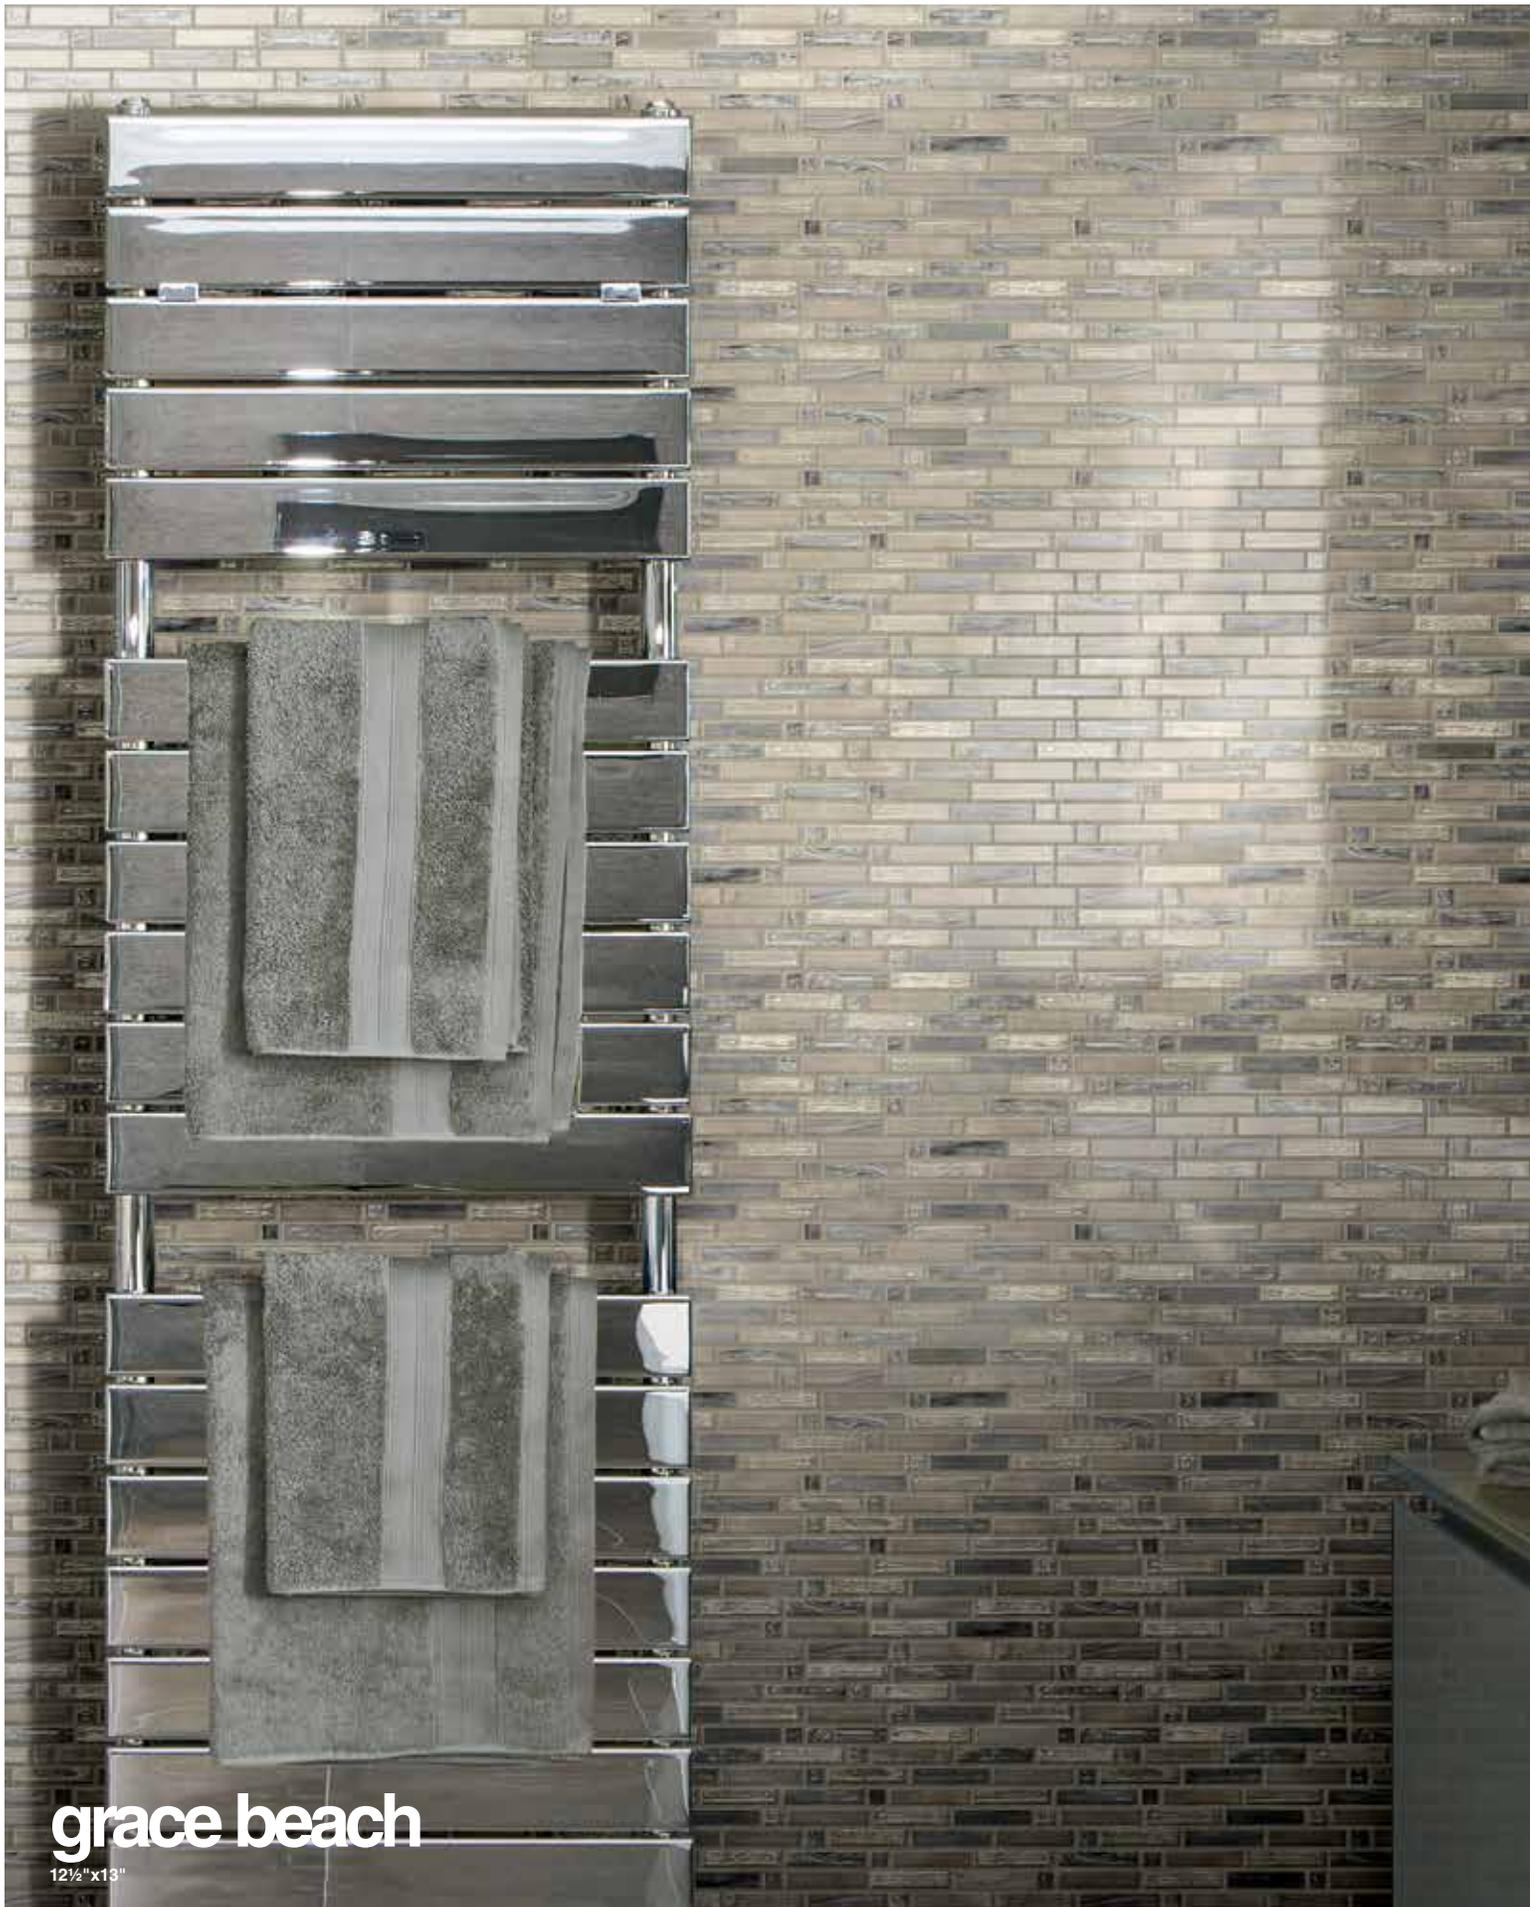

grace beach

12 1/2" x 13"



Brilliant mottled colors of sand and sea inherent to Caicos inspire the escapism so necessary to balance today's busy lifestyles. The dynamic colors are introduced while the glass is in a molten state, so they are swirled, not static. This endless movement is heightened by the ever-changing light present within a space. Six stunning colorways are included in the series: Baby Beach, Blue Beach, Crane Beach, Eagle Beach, Grace Beach and Shoal Bay.

Everyone is seeking more downtime, escape from the rigors of the day. Small accent touches or full walls of these 1"x1" and 1"x4" interlocking glass combinations can exude just the playfulness or serenity needed to balance the pressures of busy lifestyles. Caicos is so easy to pair with ceramic or porcelain tile for backsplashes, focus walls, fire and spa features, indoors and out. The frost-resistant 12½"x13" plastic/film-faced modules allow the installer to view tile alignment during installation, then peel away the protective sheet.



ULMV Baby Beach
12½"x13"



ULMW Blue Beach
12½"x13"



ULMX Crane Beach
12½"x13"

technical

ASTM Test Results

Technical Characteristics	ASTM Standards	ASTM Test Results	ASTM Test Methods
Water Absorption	≤ 0.50%	≤ 0.50%	C373
Frost Resistance	As Reported	Resistant	C1026
Scratch Resistance	MOHS 1-10	5.5	MOHS Scale
Abrasion Resistance	Class 0 - Class V	Class 0	C1027
DCOF-Dynamic Coefficient of Friction (Wet Areas Only) [†]	As Reported	N/A	DCOF AcuTest SM
Chemical Resistance	Class A - Class E	Class A	C650
Stain Resistance	Class A - Class E	Class A	C1378


[†]Dynamic Coefficient of Friction (DCOF) - Water, oil, grease or other fluids create slippery conditions. When installing floors in areas with exposure to these conditions, a minimum D.C.O.F. value of 0.42 is required. Additionally, extra caution is required with regards to product selection and proper maintenance. Visit www.tcnatile.com for complete information regarding the DCOF AcuTest test method and values.

^{*}DCOF AcuTest is the industry designation for the test procedure contained in ANSI A137.1 Section 9.6, which has been extensively researched, allows for in-situ field measurements, and is in use at tile manufacturing facilities. It was so named to distinguish it from other DCOF measurements using different instruments and/or protocols.

^{**} Whichever is less

-  Wall Tile
-  Decorative Tile
-  Suitable for Outdoors
-  Slight Variation
-  Frost Resistant
-  Abrasion Resistance



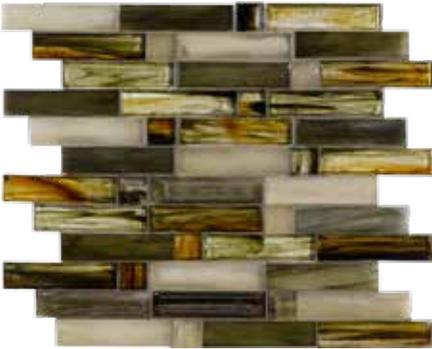

ULMY Eagle Beach
12½"x13"



ULMZ Grace Beach
12½"x13"



ULN2 Shoal Bay
12½"x13"

packaging

	Sizes	Pcs	Sq. Ft.	Weight (lbs.)	Thickness
Mosaic	12½"x13"	10	11.41	29	0.236



American Marazzi Tile, Inc.
Headquarters & Manufacturing Plant

359 Clay Road East
Sunnyvale, Texas 75182

T 972.226.0110
F 972.226.5629
www.marazzitile.com
contact@marazzitile.com



Color and other aesthetic features shown are as close as the limitation of the printing process will allow. We have tried to make this brochure as comprehensive and factual as possible. We reserve the right, however, to make changes at any time, without notice, in colors, materials, packaging, specifications and availability. Since some information may have been updated since time of printing, please check with American Marazzi Tile Customer Service for details.