



CERTIFIED  
PORCELAIN  
TILE  
60% or less water absorption

# decorum™

COLORBODY™ PORCELAIN TILE



AMERICAN OLEAN®

Photo features Decorum, Ideal White in unpolished and textured surfaces in 12 x 24 in a brick pattern.



# decorum™

Beauty and brawn. This ColorBody™ porcelain produced with micro powders is both durable and beautiful. Available in three finishes – polished, unpolished and textured, this TruEdge™ rectified and modular line offers unique design possibilities by combining multiple surfaces and sizes. The modern liner created from cut tiles in each of the three finishes serves as a decorative accent. An appealing color palette at an attractive price point makes Decorum a great choice for large projects.

## FIELD TILE

---

Available in 3 surfaces: Unpolished, Polished and Textured. Textured surface is only available in 12 x 24 size.




Ideal White DR01  
Unpolished




Refined Beige DR02  
Unpolished



Proper Taupe DR03  
Unpolished

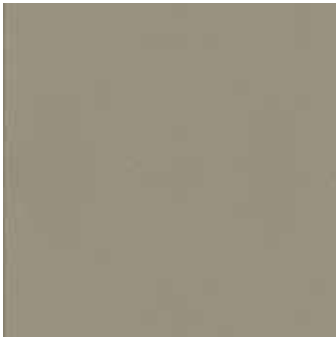

Dignified Gray DR04  
Unpolished

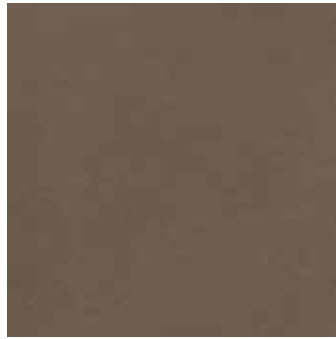

Formal Brown DR05  
Unpolished



Distinct Black DR06  
Unpolished

## SURFACE OPTIONS

---



Polished



Unpolished



Textured

## DECORATIVE TILE

---



Ideal White DR01  
Modern Liner\*



Refined Beige DR02  
Modern Liner\*



Proper Taupe DR03  
Modern Liner\*



Dignified Gray DR04  
Modern Liner\*




Formal Brown DR05  
Modern Liner\*




Distinct Black DR06  
Modern Liner\*

\*Modern Liner combines thin rectangular cuts in all three finishes: Polished, Unpolished and Textured. It comes mesh mounted on a 12 x 12 sheet.




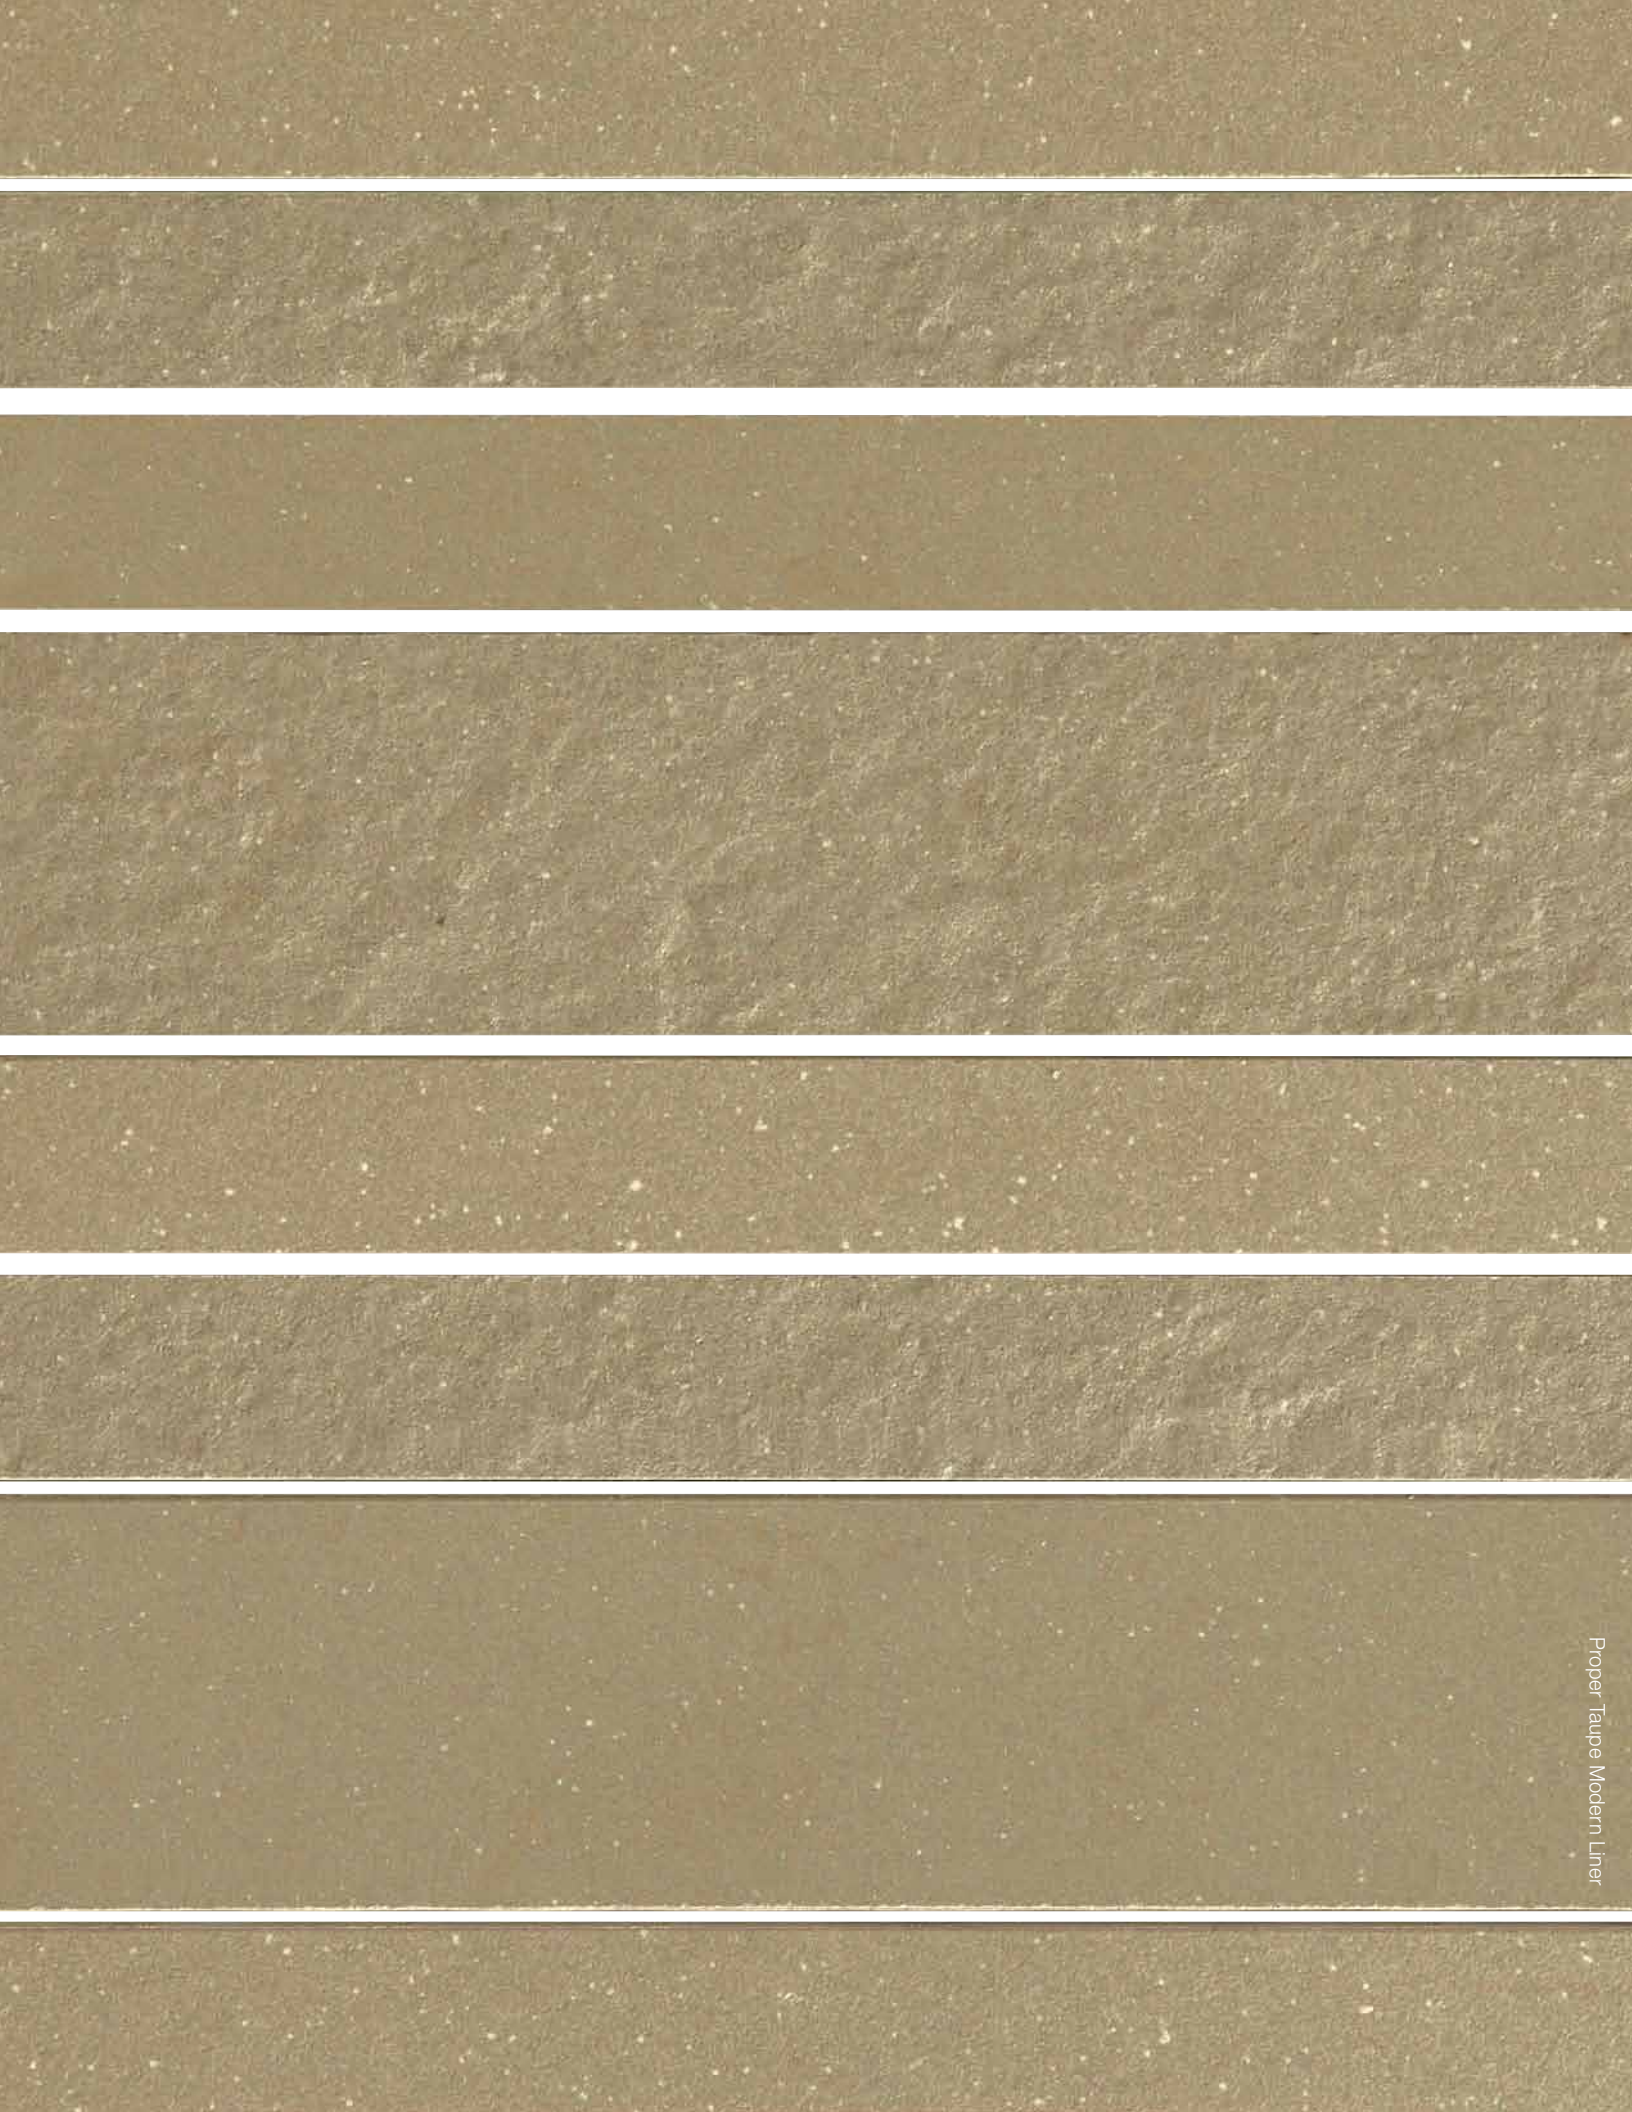

## SIZES, SHADE VARIATION & PRICING



**24 x 24 Field Tile \***  
(23-5/8" x 23-5/8")  
(60.0 cm x 60.0 cm)



**12 x 24 Field Tile \* ▲**  
(11-11/16" x 23-5/8")  
(29.7 cm x 60.0 cm)



**12 x 12 Field Tile \***  
(11-11/16" x 11-11/16")  
(29.7 cm x 29.7 cm)

\* Field tile sizes are modular.

▲ Textured surface is available in 12 x 24 size only and is suitable for pool decking and commercial exterior floors.



**12 x 12 Decorative Accent**  
(11-11/16" x 11-11/16" sheet)  
(29.7 cm x 29.7 cm sheet)  
Mesh-mounted



Tile Thickness: 3/8"

**Medium**  
(V2)


Recommended Grout Joint: 1/8" (3/16" when multiple sizes are used in a modular pattern or when rectangular size is used in a staggered brick-joint pattern, overlap not to exceed 33%.)

Pricing: High

## TRIM



**Bullnose**  
S-43C9  
3 x 12




**Cove Base**  
P-36C9T  
6 x 12




**Cove Base Outcorner**  
PC-36C9T  
6 x 1

## PATTERN IDEAS



**Corridor Pattern**  
17 pcs. per 100 s/f  
24 x 24 67%  
17 pcs. per 100 s/f  
12 x 24 33%



**Cobblestone Pattern**  
32 pcs. per 100 s/f  
12 x 24 67%  
21 pcs. per 100 s/f  
12 x 12 33%

## PERFORMANCE CHARACTERISTICS

	D.C.O.F. Wet	C.O.F. Wet Dry		Moisture Absorption	Breaking Strength	MOH's	Chemical Resistance	Abrasion Resistance
⑤ Textured	≥0.42	≥0.65	≥0.80	<0.5%	>450 lbs.	8.0	Resistant	N/A
⑥ Unpolished	≥0.42	≥0.60	≥0.70	<0.5%	>450 lbs.	8.0	Resistant	N/A
Polished	<0.42	≥0.50	≥0.70	<0.5%	>450 lbs.	8.0	Resistant	N/A

Dynamic C.O.F. (Wet) value as measured by the DCOF AcuTest™ helps to assess a product's suitability for a commercial environment. For more information, visit [www.americanolean.com/DCOF](http://www.americanolean.com/DCOF).

## APPLICATIONS

	INTERIOR			EXTERIOR	
	RES	LT COM	COM	RES	COM
Floors/Patios: Covered & Uncovered	●	●	●*	●*	●▲
Walls/Backsplashes	●	●	●	●	●
Countertops	●	●	●	●	●
Pool Linings	●	●	●	●	●
Pool Decking ▲	●	●	●	●	●

- \* Unpolished and textured surfaces
- ▲ Textured surface only

### APPLICATION NOTES:

- Textured surface field tile suitable for exterior floors (including pool decks) in freezing and non-freezing climates when proper installation methods are followed.
- Special Installation Requirement: For proper bonding, medium bed mortar should be utilized in installing tiles with a dimensional length size greater than 20" x 20", large rectangles or tiles with greater dimensional thickness than normal. Back buttering tiles of this nature in the installation process will also assure proper coverage for bonding.
- Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the tile surface.
- Use of a latex modified thin-set is recommended for proper installation.
- Not for use on ramps.
- For additional information, refer to Factors to Consider at [www.americanolean.com/CommercialFactors](http://www.americanolean.com/CommercialFactors).

### Cleaning Procedures

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for porcelain tile
- Remove cleaning solution with a clean, damp sponge or mop

### Installation Methods

#### Backing Materials

- Concrete
- Mortar bed
- Cementitious backer board

### Setting

- Latex modified thin-set
- Epoxy

### Grouting

- Sanded grout
- Recommended Grout Joint: 1/8" (3/16" when multiple sizes are used in a modular pattern or when rectangular size is used in a staggered brick-joint pattern, overlap not to exceed 33%.)

## NOTES

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information, refer to "Factors to Consider" at <http://americanolean.com/factors-to-consider.cfm>.

Since there is shade variation in all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.



RECYCLED MATERIALS



EXTERIOR PRODUCT



TRU-EDGE



Naturally, many of our products can help you earn LEED™ credits. Visit [aogreenworks.com](http://aogreenworks.com) for detailed information.

americanolean.com



888-AOT-TILE

© 2013 American Olean (2/13)SSAODECORUM