

GLAZED PORCELAIN / CERAMIC  
**FIDENZA**<sup>TM</sup>



 **daltile**<sup>®</sup>  
DESIGN WITH CONFIDENCE<sup>™</sup>



FIDENZA™

GLAZED PORCELAIN / CERAMIC

*floor • wall • countertop*

*Porcelain Floor Tile*



BIANCO FD01



DORADO FD03



CAFÉ FD02

*Ceramic Wall Tile*



BIANCO FD01



DORADO FD03



CAFÉ FD02

## *Ceramic Mosaics*



BIANCO FD01  
2 x 2 Mosaic



CAFÉ FD02  
2 x 2 Mosaic



DORADO FD03  
2 x 2 Mosaic

## *Decorative Accents*



UNIVERSAL FD10 2 x 9 Stone and Glass Accent




UNIVERSAL FD10 3 x 12 Border

# CREATIVE IDEAS

<i>Color</i>			
	BIANCO FD01	DORADO FD03	CAFÉ FD02
<i>Accent</i>			
	SALERNO UNIVERSAL SL87 3 x 12 Decorative Accent	TUMBLER STONE WALNUT TS17 2 x 12 Rope Accent Strip	FASHION ACCENTS DAMASK FA76 2 x 10 Mosaic

## *Backsplash Design Idea*

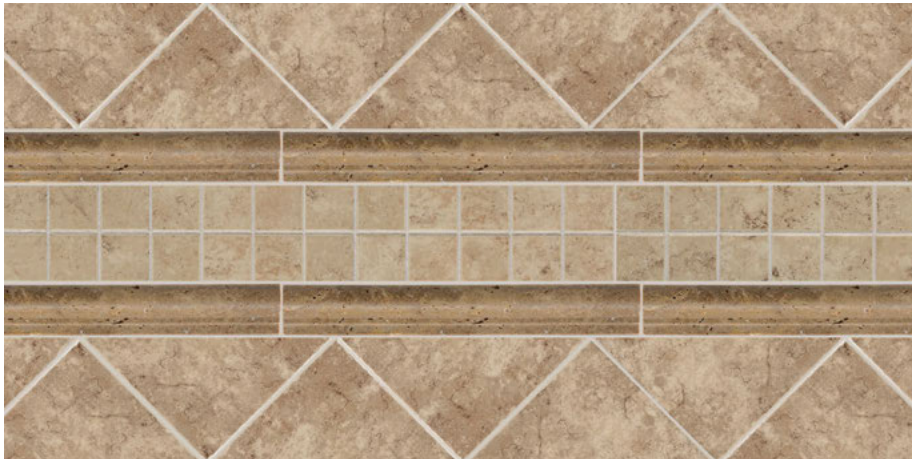

Backsplash features Café 12 x 12 field tile and coordinating 2 x 2 mosaic with Travertine in Noce 2 x 12 chair rail.

## *Pattern Ideas*



GRID PATTERN  
WITH FLOOR BORDER



BRICK PATTERN



WALL DIAMOND PATTERN  
WITH ACCENT



DIAMOND PATTERN

## SIZES

		SQ.FT. CARTON	PCS. PER CARTON
18 x 18 Floor Tile (Porcelain)	(17-13/16" x 17-13/16") (45.2 cm x 45.2 cm)	18.00	8
12 x 12 Floor Tile (Porcelain)	(11-13/16" x 11-13/16") (30 cm x 30 cm)	11.00	11
9 x 12 Wall Tile (Clay body ceramic)	(8-15/16" x 11-15/16") (22.7 cm x 30.3 cm)	11.25	15
6 x 6 Wall Tile (Clay body ceramic)	(6" x 6") (15.2 cm x 15.2 cm)	12.50	50
3 x 12 Porcelain Universal Border	(2-13/16" x 11-15/16")	--	10
2 x 9 Stone and Glass Accent	(2-13/16" x 9")	--	10
2 x 2 Mosaic (Clay body ceramic) (Dot-mounted on 12 x 24 sheet)	(24" x 12" Sheet) (60.96 cm x 30.48 cm)	24.00	12

## RESIDENTIAL USAGE

FLOORS	WALLS	COUNTERTOPS	EXTERIOR PATIOS	EXTERIOR POOL DECKS
F*	W	C	EP**	

\*Wall tile suitable for residential bathroom floors only.

\*\*Floor tile only.

## COMMERCIAL USAGE

	INTERIOR			EXTERIOR	
	LIGHT RESIDENTIAL	COMMERCIAL	COMMERCIAL	RESIDENTIAL	COMMERCIAL
Floors/Patios	✓*	✓	✓	✓**	
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking					
Pool Linings	✓	✓	✓	✓	✓

Suitable for exterior walls in freezing and non-freezing climates when proper installation methods are followed. Wall tile suitable for exterior walls in non-freezing climates only.

\*Wall tile suitable for residential bathroom floors only.

\*\*Floor tile only.

## NOTES

**Manufacturer Warning:** Wall tile has a dynamic coefficient of friction less than 0.42 as measured by the DCOF Acutest method. Tiles with DCOF Acutest values less than 0.42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, grease and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall or personal injury. See ANSI standard A137.1 section 6.2.2.1.10, available at [www.tileusa.com](http://www.tileusa.com).

Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, the tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.


Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information, refer to "Factors to Consider" at <http://daltille.com/factors-to-consider.cfm>.

## TRIM

	TYPE	NUMBER	SIZE	PCS. PER CARTON
	Floor Bullnose	P-43C9	3 x 12	30
	Bullnose	S-4309	3 x 9	54
	Bullnose Corner	SN-4309	3 x 3	32
	Surface Bullnose	S-4269	2 x 6	100
	Surface Bullnose Outcorner	SN-4269	2 x 2	50
	Radius Bullnose	A-4200	2 x 6	100
	Radius Bullnose Corner	AN-4200	2 x 2	200
	Counter Rail	26CRWL	2 x 6	36
	Counter Rail Corner	22CRCN	2 x 2	24
	Quarter Round	A-106	1 x 6	152
	Quarter Round Corner	UC-106	1 x 1	40
	Mosaics	S-886MS	2 x 2	108

## SHADE VARIATION



## INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION
5/16"	3/16" (Floor), 1/4" (Mosaic) and 1/16" (Wall)

## DYNAMIC C.O.F. (WET) : 1 & 2

The higher the rating, the higher the slip resistance.

1 < .42

2 ≥ .42 (Floor tile only)

## STATIC C.O.F. (WET) : 1 & 2

1 .50 - .59

2 ≥ .60 (Floor tile only)

## TEST RESULTS

	ASTM#	FLOOR RESULT	WALL RESULT	MOSAIC RESULT
Water Absorption	C373	< 0.5%	< 20.0%	< 3.0%
Breaking Strength	C648	275 lbs	100-230 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0	4.0-6.5	8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant
Dynamic C.O.F.	A137.1	≥ 0.42	< 0.42	≥ 0.42
Static C.O.F.	C1028	Wet: ≥ 0.60 Dry: ≥ 0.65	Wet: 0.50 - 0.59 Dry: ≥ 0.80	Wet: ≥ 0.60 Dry: ≥ 0.70

Dynamic C.O.F. (Wet) value as measured by the DCOF AcuTest™ helps to assess a products suitability for a commercial environment. For more information, visit our website at [www.daltille.com/DCOF](http://www.daltille.com/DCOF).

# FIDENZA™

## GLAZED PORCELAIN / CERAMIC



*floor • wall • countertop*



**daltile**  
**greenworks™**  
ENVIRONMENTAL LEADERSHIP THAT WORKS

By their very design, Daltile products can help make it easier for you to earn LEED™ points and/or points towards many industry leading green home building programs. From using recycled material content to establishing manufacturing facilities within 500 miles of your project, we help ensure you don't have to compromise your design to be environmentally conscious. For detailed information, visit [daltilegreenworks.com](http://daltilegreenworks.com).



PRE CONSUMER  
RECYCLED MATERIALS



EXTERIOR  
PRODUCT

CERTIFIED  
**PORCELAIN**  
TILE  
0.5% or less water absorption



7834 C. F. Hawn Freeway | Dallas, TX 75217 | 214.398.1411 | 800.933.TILE  
For more information about Daltile products and services, visit our website at [daltile.com](http://daltile.com)