



FLOOR

YORKWOOD MANOR™

GLAZED PORCELAIN with Reveal Imaging™

 **daltile®**
IMAGINE WHAT'S POSSIBLE



Photo features Pecan 6 x 36 field tile.
Cover photo features Deep Walnut 6 x 36 field tile.

Design with the Style of Historic New England

Bring the look of New England's historic homes and barns into any setting with Yorkwood Manor tile. These porcelain tiles elegantly recreate the intricate detailing of reclaimed wood with deliberate cracked paint and water stain detailing. Richly inspired and filled with character, Yorkwood Manor adds beauty and a sense of history to any space.

- **RUSTIC SOPHISTICATION**
 - Replicate the authentic look of painted and aged floors with Reveal Imaging™ technology
 - Intricate detailing including water stains and wood striations produce a unique, rustic look
 - Plank size simulates the look of real wood
- **MADE TO PERFORM**
 - Durable porcelain tile is ideal for high-traffic and moisture-prone areas

 **PRE CONSUMER RECYCLED MATERIALS**

 **MADE IN THE U.S.A.**

 **REVEAL IMAGING™**

All or select items within this series are made in the USA. For more information, visit daltille.com/YorkwoodManor.

 **CERTIFIED PORCELAIN TILE**
0.1% or less water absorption


FIELD TILE



Pecan YM02



Deep Walnut YM03

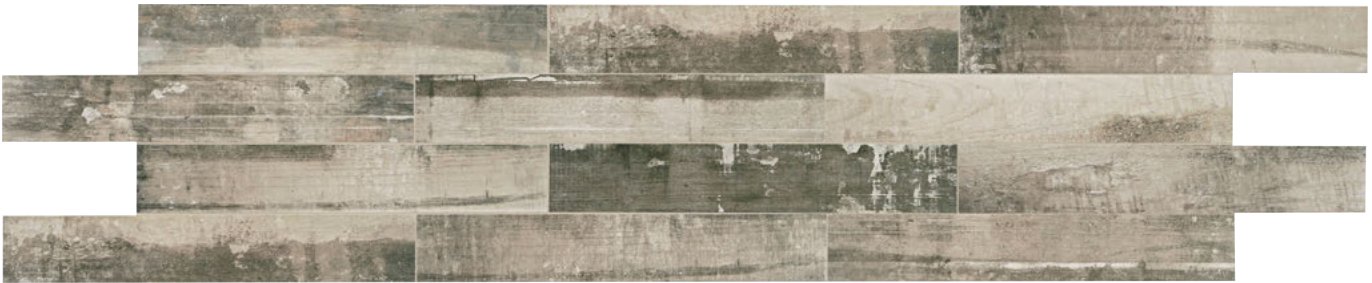


Birchtree YM01

FLOOR

YORKWOOD MANOR™

GLAZED PORCELAIN with Reveal Imaging™

SIZES

			Thickness	Sq. Ft. per Carton	Pieces Per Carton
	6 x 36 Field Tile	(5-7/8" x 35-7/16") (15.00 cm x 90.00 cm)	5/16"	14.50	10

FLOOR APPLICATIONS

	Target DCOF wet	Tile Texture or Added Abrasive	Suitable
Dry & Level – Interior	N/A	N/A	✓
Wet & Level – Interior	≥ 0.42	Optional	✓
Commercial Dining Areas – Interior	≥ 0.50	Optional	
Pool Decking & other wet areas with minimal footwear	≥ 0.55	Required if tile size is > 3 x 3	
Covered Exterior	≥ 0.60	Required if tile size is > 3 x 3	
Interior Ramps, Incline and Uncovered Exterior	≥ 0.65	Required if tile size is > 6 x 6	


Floor tile suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

A DCOF value of ≥ 0.42 is the new standard for tiles specified for commercial application in standard A1371–2012, Section 9.6. It replaces the SCOF value of ≥ 0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest™, visit www.daltile.com/dcof.

OTHER APPLICATIONS


	Suitable
Walls/Backsplashes	✓
Countertops	✓
Pool Linings	

TRIM

Type	Number	Size	Pieces Per Carton
 Bullnose	S-43H9	3 x 18	16

Floor bullnose trim is intended to coordinate with floor field tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
3/16" (overlap should not exceed 33% when installing rectangular size in a staggered brick-joint pattern)	 Random (V4)

TEST RESULTS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs.
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	3

For additional information, visit daltile.com/information/TestResults.

NOTES

Special consideration needs to be given when installing tiles 20" and larger. Please refer to daltile.com/LargeTiles for more information.

Use of a latex modified thin-set is recommended for installation.

Strong random shading enhances the natural beauty of this product. To achieve optimal results, tile should be selected from multiple cartons and shading arrangement planned prior to installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at daltile.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GET.DAL TILE.COM



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE

©2015 Dal-Tile Corporation (3/15)