




Trenta™
Wood Collection

Trenta™ Collection

Trenta offers diverse, naturally dramatic designs of distinctive beauty. From smoked ash to zebra wood, travertine to weathered sandstone, linen to metallics – explore the possibilities of premium LVT through Trenta's richly textured visuals.

Trenta is created for ultimate flexibility of design. Various sizes and visuals complement a range of interior spaces, while a 30 mil wear layer and tough urethane finish allow for heavy traffic in a variety of commercial settings. Select wood visuals are available in 4" x 36", 7.25" x 48" and 9" x 48", or choose emulations of stone and other unique materials available in 12" x 24", 18" x 18" and 18" x 36".

Featuring a 20-year commercial warranty, Trenta's fusion of ultra-modern character and natural beauty coordinates perfectly with other Mohawk Group flooring.

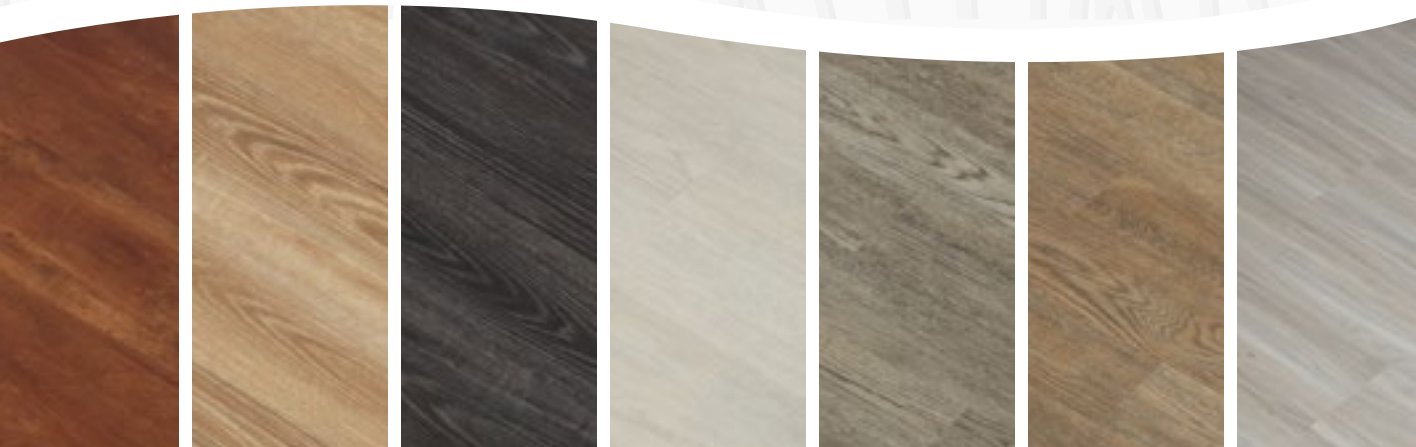






Beautifully Strong

With a name that means “thirty,” Trenta’s substantial 30 mil wear layer exceeds industry standards, bringing modern elegance to spaces that require heavy commercial loads and traffic. A commercial grade urethane finish protects the visual for sustained dramatic impact, while polish-optional maintenance makes Trenta easy to care for over the life of the installation.


High Performance Resilient Tile

Construction: Trenta features a 30 mil commercial wear layer and is coated with Commercial Grade Urethane, which is polish-optional for versatile, cost-effective maintenance. Trenta is backed by a 20 year commercial warranty.

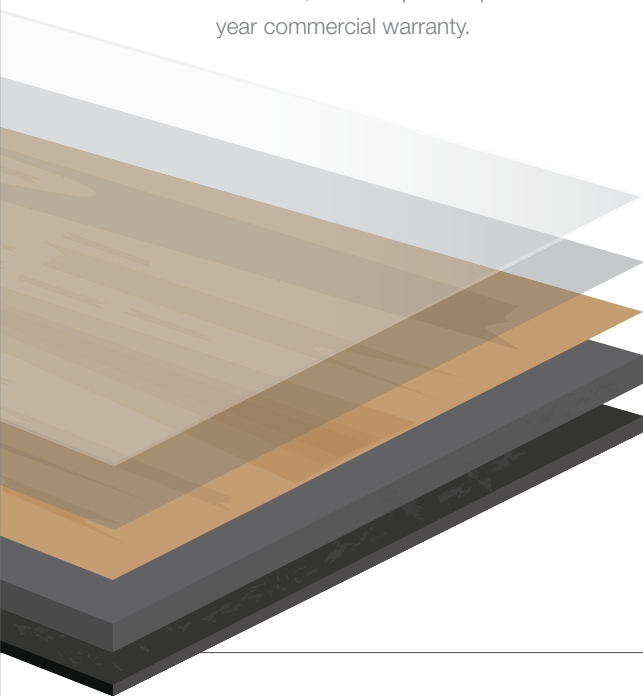

- Commercial Grade Urethane
- Heavy Commercial Wear Layer
- Decorative Print Film
- Commercial Base
- Stabilizing Back Layer

Trenta Plank 4" x 36"

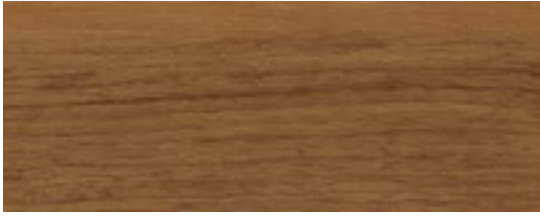

Asiana Teak
843 Asiana Teak



Hearty Oak
943 Winter Oak



Bamboo
268 Chai Latte



Hearty Oak
929 Drift Oak



Bamboo
863 Cherry Mocha



Hearty Oak
853 Summer Oak



Canadian Cherry
262 Canadian Cherry



Mahogany
888 Mahogany

Styled By Nature

Trenta's colorways and textures emulate an incredible range of wood species, including distinctive apple wood, an array of modern oaks, sophisticated ash and beech, and exotic mahogany. Three plank sizes – 4" x 36", 7.25" x 48" and 9" x 48" (style dependent) – ensure the right fit for a range of spaces, for total design flexibility within a single collection.

Trenta Plank 4" x 36"



Maple
383 Red Maple



Teak
173 Butternut



Quebec Maple
938 Steam



Walnut
862 Leather



Quebec Maple
162 Nordic


Trenta Plank 9" x 48"



Downtown Oak
163 Untouched



French Oak
852 Nice Finnish

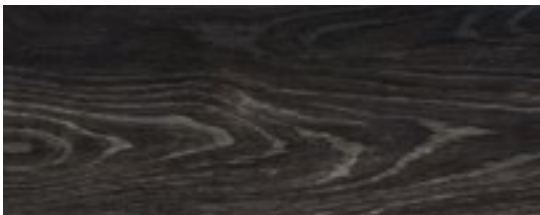

Downtown Oak
999 Deep Space



Wide Plank Classic
351 Fawn

Trenta Plank 7.25" x 48" (C0051)




Apple Wood
172 Dune



Smoked Ash
949 Graceful Gray



Apple Wood
882 Havana

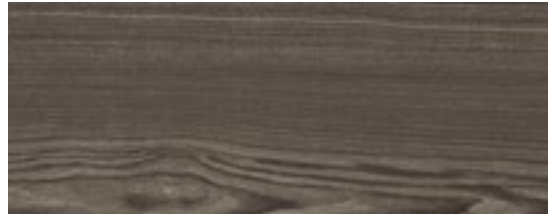

Smoked Ash
889 Copenhagen



Natural Beech
911 Starlet



Wide Plank Classic
939 Pewter



Natural Beech
858 Mink



Wide Plank Classic
989 Night Shade



Natural Beech
898 Chestnut



Zebra Wood
158 Pismo Beach



Rustic Premium
378 Gingersnap





Specifications

Style Name / Number

Plank 4"x36" (C0050); Plank 7.25"x48" (C0051);

Brand

Plank 9"x48" (C0052)

Product Type

Mohawk Group - Hard Surface

Resilient Tile



DESIGN

Overall Gauge

.12" (3mm)

Wear Layer

30 mil (0.7mm)

Finish

Commercial Grade Urethane

Colors Available / Size

Each color only available in size shown:

4"x36" - 13 colors

7.25"x48" - 11 colors

9"x48" - 4 colors

Packaging

4"x36" - 36 sf per carton; 36 pcs per carton

7.25"x48" - 38.7 sf per carton; 16 pcs per carton

9"x48" - 36 sf per carton; 12 pcs per carton

Installation

Glue Down

Recommended Adhesive

M950 Acrylic, M700 Pressure Sensitive



PERFORMANCE

Construction

Heavy Commercial Grade Resilient Tile

Classification

ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed

Squareness

ASTM F2055 - Passes - 0.010 in. max

Size and Tolerance

ASTM F2055 - Passes - ± 0.016 in. per linear foot

Thickness

ASTM F386 - Passes - Nominal ± 0.005 in.

Flexibility

ASTM F137 - Passes - 1.0 inch mandrel, no cracks or breaks

Dimensional Stability

ASTM F2199 - Passes - ≤ 0.020 in. per linear foot

Static Load Limit

ASTM F970 - Passes, modified - 2500 psi

Residual Indentation

ASTM F1914 - Passes - Average less than 8%

Slip Resistance

ASTM D2047 - Passes - > 0.6 Dry

Resistance to Chemicals

ASTM F925 - Passes - No Change

Resistance to Light

ASTM F1515 - Passes - $\Delta E \leq 8$

Resistance to Heat

ASTM F1514 - Passes - $\Delta E \leq 8$

Critical Radiant Flux

ASTM E648 - Passes - ≥ 0.45 watts/cm², Class 1

Smoke Density

ASTM E662 - < 450

Impact Insulation Class

ASTM E989 / E492 - 59



SUSTAINABILITY

Certification

FloorScore® Certified SCS-FS-01495



SERVICE

Warranty

Limited 20 Year Commercial

