

North Ridge



NORTH RIDGE
style I207V

RELIC ASH
color 02500

patcraft®

Patcraft's LVT resilient plank flooring is engineered for high demand environments. Manufactured using high performance raw materials, North Ridge is created to offer unparalleled strength and durability for end use installations. Durability, wear retention, longevity and many other performance requirements drive Patcraft product design so you know when you specify Patcraft, you specify performance.

because flooring matters.

North Ridge

Features and Benefits

- High performance resilient designed for high demand environments.
- ExoGuard™ Quartz Enhanced Urethane finish and 20 mil wear layer ensures performance in a variety of high demand commercial applications.
- Deep embossed texture for a realistic wood feel.
- 10 year limited commercial wear warranty.
- High performance matte finish is polish and buff optional for hassle.
- Unmatched 10 year under bed warranty when installed with advanced adhesive Shaw 4100 or 5 year under bed warranty when installed with Shaw S150.
- FloorScore® certified for low VoCs.
- Recommended Applications: High performance, high traffic end use applications including healthcare, education, retail and assisted living.

Product Specifications

Style Name	NORTH RIDGE
Style Number	I207V 6" x 36" I206V 4" x 36"
Construction	LVT
Wear Layer	20 mil
Wear Layer Thickness	.020" (0.5 mm)
Overall Thickness	.118" (3.0 mm)
Reference Specification	Class III printed film vinyl plank
ASTM 1700	Type A (smooth) Type B (embossed)
Finish	ExoGuard Quartz Enhanced Urethane
Installation	Glue Down
Recommended Adhesive	Shaw 4100 or S150

Packaging for I207V

Plank Size	6" width x 36" length
Pieces/Box	24
Sq. Ft./Box	35.65
Weight (Lb./Box)	38
Weight (Lb./Sq. Ft.)	1.06

Packaging for I206V

Plank Size	4" width x 36" length
Pieces/Box	36
Sq. Ft./Box	35.95
Weight (Lb./Box)	38
Weight (Lb./Sq. Ft.)	1.06

Warranty

10 year limited commercial wear warranty, 10 year under bed warranty when installed with Shaw 4100 or 5 year under bed warranty when installed with S150 adhesive. Please visit patcraft.com for the most current warranty information

Performance Testing

Slip Resistance / ASTM D 2047	>0.65
Residual Indentation / ASTM F 970	1500 psi (lbs/sq in)
Flexibility / ASTM F 137	Passes
Resistance to Heat / ASTM F 1514	Passes
Resistance to Light / ASTM F 1515	Passes
Resistance to Chemicals / ASTM F 925	Passes
Resistance to Fungi / ASTM G21	Passes
Antibacterial Activity / AATCC 147	Passes
Radiant Flux / ASTM E 648	>0.45 watts/cm2, NFPA Class I
Smoke Density / ASTM E 662	<450, Passes


Environmental

Indoor Air Quality	FloorScore® certified
LEED Scoreboard	IEQ4.1, IEQ4.3

Maintenance

Patcraft resilient products do not always require a floor finish. However, in certain applications a floor finish may be desirable to aid in stain resistance, resistance to abrasion or increase gloss level.

Construction

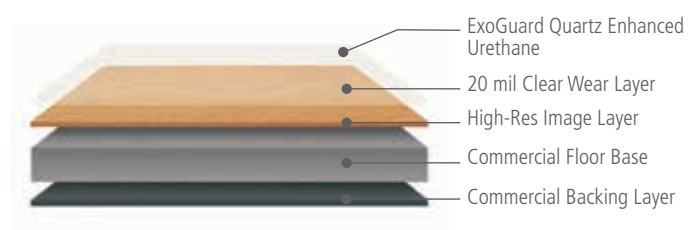

Installation

(see patcraft.com for complete installation instructions)

- Flooring material and adhesive must be acclimated to the installation area for a minimum of 48 hours prior to installation.
- Ensure that moisture tests have been conducted and that results do not exceed 7.0 lbs per 1000 sf in 24 hours as per ASTM F-1869, (87% when using Shaw 4100 or 90% when using Shaw S150) In-Situ relative humidity when tested according to ASTM F-2170.
- pH of concrete sub-floor must not exceed 10.
- Patcraft LVT is installed using conventional tile installation techniques.
- Use Shaw S150 spray adhesive or Shaw 4100 and a 1/32" x 1/16" x 1/32" U-notch trowel to permanently install resilient flooring.
- In most cases, the tile should be immediately placed into the adhesive, before the adhesive has had an opportunity to dry. Good transfer of adhesive to the backing of the tile is essential for proper bond.
- Material should always be visually inspected prior to installation. Any material installed with visual defects.

Swatches



