









Stainless steel



Notes:

- Radius available for JOLLY in metal profiles only.
- JOLLY in polished aluminum and chrome-plated brass require a relatively large bending radius.

Stainless Steel


Schluter®-JOLLY			
Length = 2.5 m - 8' 2-1/2"		Brushed stainless steel 304 (1.4301 = V2A) (EB)	
H = mm - in.	Profile	Outside corner	
6 - 1/4	J 60 EB	EV / J 60 EB	
8 - 5/16	J 80 EB	EV / J 80 EB	
10 - 3/8	J 100 EB	EV / J 100 EB	
11 - 7/16	J 110 EB	EV / J 110 EB	
12.5 - 1/2	J 125 EB	EV / J 125 EB	

Brass

Schluter®-JOLLY			
Length = 2.5 m - 8' 2-1/2"		Chrome-plated solid brass (MC)	
H = mm - in.	Profile	Outside corner	
6 - 1/4	J 60 MC	EV / J 60 MC	
8 - 5/16	J 80 MC	EV / J 80 MC	
10 - 3/8	J 100 MC	EV / J 100 MC	
11 - 7/16	J 110 MC	EV / J 110 MC	
12.5 - 1/2	J 125 MC	EV / J 125 MC	


2 corners/end caps and corner connector pins per order

Connector
V / J PP4

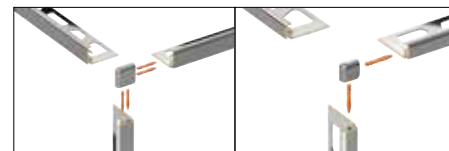

H = 1/2" (12.5 mm)

H = 1/4"-7/16" (6-11 mm)

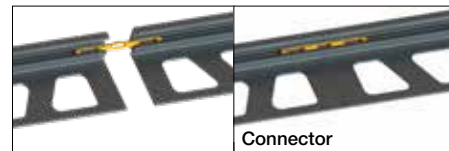

Connector

Note: The same corner piece can be used to produce a 90° inside corner and a 90° outside corner. It can also be used as an end cap.



Anodized aluminum



- Notes:
- Radius available for JOLLY in metal profiles only.
 - JOLLY in polished aluminum and chrome-plated brass require a relatively large bending radius.

Anodized Aluminum

Schluter®-JOLLY					
Length = 2.5 m - 8' 2-1/2"		Satin anodized aluminum (AE)		Polished chrome anodized aluminum (ACG)	
H = mm - in.	Profile	Outside corner	Profile	Outside corner	
6 - 1/4	J 60 AE	EV / J 60 AE	J 60 ACG	EV / J 60 ACG	
8 - 5/16	J 80 AE	EV / J 80 AE	J 80 ACG	EV / J 80 ACG	
10 - 3/8	J 100 AE	EV / J 100 AE	J 100 ACG	EV / J 100 ACG	
11 - 7/16	J 110 AE	EV / J 110 AE	J 110 ACG	EV / J 110 ACG	
12.5 - 1/2	J 125 AE	EV / J 125 AE	J 125 ACG	EV / J 125 ACG	

Length = 2.5 m - 8' 2-1/2"		Brushed chrome anodized aluminum (ACGB)		Satin nickel anodized aluminum (AT)	
H = mm - in.	Profile	Outside corner	Profile	Outside corner	
6 - 1/4	J 60 ACGB	EV / J 60 ACGB	J 60 AT	EV / J 60 AT	
8 - 5/16	J 80 ACGB	EV / J 80 ACGB	J 80 AT	EV / J 80 AT	
10 - 3/8	J 100 ACGB	EV / J 100 ACGB	J 100 AT	EV / J 100 AT	
11 - 7/16	J 110 ACGB	EV / J 110 ACGB	J 110 AT	EV / J 110 AT	
12.5 - 1/2	J 125 ACGB	EV / J 125 ACGB	J 125 AT	EV / J 125 AT	

Length = 2.5 m - 8' 2-1/2"		Polished nickel anodized aluminum (ATG)		Brushed nickel anodized aluminum (ATGB)	
H = mm - in.	Profile	Outside corner	Profile	Outside corner	
6 - 1/4	J 60 ATG	EV / J 60 ATG	J 60 ATGB	EV / J 60 ATGB	
8 - 5/16	J 80 ATG	EV / J 80 ATG	J 80 ATGB	EV / J 80 ATGB	
10 - 3/8	J 100 ATG	EV / J 100 ATG	J 100 ATGB	EV / J 100 ATGB	
11 - 7/16	J 110 ATG	EV / J 110 ATG	J 110 ATGB	EV / J 110 ATGB	
12.5 - 1/2	J 125 ATG	EV / J 125 ATG	J 125 ATGB	EV / J 125 ATGB	

Length = 2.5 m - 8' 2-1/2"		Satin copper anodized aluminum (AK)		Polished copper anodized aluminum (AKG)	
H = mm - in.	Profile	Outside corner	Profile	Outside corner	
6 - 1/4	J 60 AK	EV / J 60 AK	J 60 AKG	EV / J 60 AKG	
8 - 5/16	J 80 AK	EV / J 80 AK	J 80 AKG	EV / J 80 AKG	
10 - 3/8	J 100 AK	EV / J 100 AK	J 100 AKG	EV / J 100 AKG	
11 - 7/16	J 110 AK	EV / J 110 AK	J 110 AKG	EV / J 110 AKG	
12.5 - 1/2	J 125 AK	EV / J 125 AK	J 125 AKG	EV / J 125 AKG	

Length = 2.5 m - 8' 2-1/2"		Brushed copper anodized aluminum (AKGB)		Satin brass anodized aluminum (AM)	
H = mm - in.	Profile	Outside corner	Profile	Outside corner	
6 - 1/4	J 60 AKGB	EV / J 60 AKGB	J 60 AM	EV / J 60 AM	
8 - 5/16	J 80 AKGB	EV / J 80 AKGB	J 80 AM	EV / J 80 AM	
10 - 3/8	J 100 AKGB	EV / J 100 AKGB	J 100 AM	EV / J 100 AM	
11 - 7/16	J 110 AKGB	EV / J 110 AKGB	J 110 AM	EV / J 110 AM	
12.5 - 1/2	J 125 AKGB	EV / J 125 AKGB	J 125 AM	EV / J 125 AM	



Schluter®-JOLLY				
Length = 2.5 m - 8' 2-1/2"	Polished brass anodized aluminum (AMG)		Brushed brass anodized aluminum (AMGB)	
H = mm - in.	Profile	Outside corner	Profile	Outside corner
6 - 1/4	J 60 AMG	EV / J 60 AMG	J 60 AMGB	EV / J 60 AMGB
8 - 5/16	J 80 AMG	EV / J 80 AMG	J 80 AMGB	EV / J 80 AMGB
10 - 3/8	J 100 AMG	EV / J 100 AMG	J 100 AMGB	EV / J 100 AMGB
11 - 7/16	J 110 AMG	EV / J 110 AMG	J 110 AMGB	EV / J 110 AMGB
12.5 - 1/2	J 125 AMG	EV / J 125 AMG	J 125 AMGB	EV / J 125 AMGB

Length = 2.5 m - 8' 2-1/2"	Brushed antique bronze anodized aluminum (ABGB)		Bright black anodized aluminum (AGSG)	
H = mm - in.	Profile	Outside corner	Profile	Outside corner
6 - 1/4	J 60 ABGB	EV / J 60 ABGB	J 60 AGSG	EV / J 60 AGSG
8 - 5/16	J 80 ABGB	EV / J 80 ABGB	J 80 AGSG	EV / J 80 AGSG
10 - 3/8	J 100 ABGB	EV / J 100 ABGB	J 100 AGSG	EV / J 100 AGSG
11 - 7/16	J 110 ABGB	EV / J 110 ABGB	J 110 AGSG	EV / J 110 AGSG
12.5 - 1/2	J 125 ABGB	EV / J 125 ABGB	J 125 AGSG	EV / J 125 AGSG



Length = 2.5 m - 8' 2-1/2"	Brushed graphite anodized aluminum (AGRB)	
H = mm - in.	Profile	Outside corner
6 - 1/4	J 60 AGRB	EV / J 60 AGRB
8 - 5/16	J 80 AGRB	EV / J 80 AGRB
10 - 3/8	J 100 AGRB	EV / J 100 AGRB
11 - 7/16	J 110 AGRB	EV / J 110 AGRB
12.5 - 1/2	J 125 AGRB	EV / J 125 AGRB

10-foot (3.05 m) JOLLY Profiles – Anodized Aluminum				
Length = 3.05 m - 10'	Satin anodized aluminum (AE)	Polished chrome anodized aluminum (ACG)	Satin nickel anodized aluminum (AT)	Brushed antique bronze anodized aluminum (ABGB)
H = mm - in.	Profile	Profile	Profile	Profile
8 - 5/16	J 80 AE / 300	J 80 ACG / 300	J 80 AT / 300	J 80 ABGB / 300
10 - 3/8	J 100 AE / 300	J 100 ACG / 300	J 100 AT / 300	J 100 ABGB / 300
12.5 - 1/2	J 125 AE / 300	J 125 ACG / 300	J 125 AT / 300	J 125 ABGB / 300

Accessories	Item No.
End cap, outside/inside corner ¹	EV / profile item number *
Connector	V / JPP4

¹2 corners/end caps and corner connector pins per order

How to order corners:
 *To complete the item number for corners, add the corresponding **profile item number** (e.g., EV / J 80 ATGB).

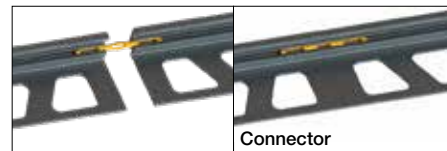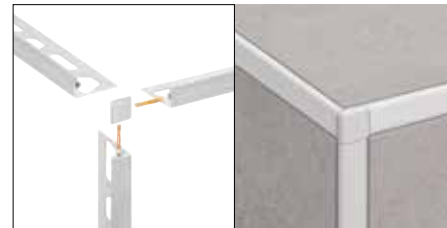

Connector



Schluter®-TRENDLINE Textured Color-coated Aluminum

Schluter®-JOLLY		
Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum (TS)	
H = mm - in.	Profile	Outside corner
6 - 1/4	J 60 + color*	EV / J 60 + color*
8 - 5/16	J 80 + color*	EV / J 80 + color*
10 - 3/8	J 100 + color*	EV / J 100 + color*
11 - 7/16	J 110 + color*	EV / J 110 + color*
12.5 - 1/2	J 125 + color*	EV / J 125 + color*

***Color Codes**

* To complete the item number, add the **color** code (e.g., J 60 **TSC**).

Matte White and Matte Black

Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum	
H = mm - in.	Profile	Outside corner
6 - 1/4	J 60 + color*	EV / J 60 + color*
8 - 5/16	J 80 + color*	EV / J 80 + color*
10 - 3/8	J 100 + color*	EV / J 100 + color*
11 - 7/16	J 110 + color*	EV / J 110 + color*
12.5 - 1/2	J 125 + color*	EV / J 125 + color*

***Color Codes**

* To complete the item number, add the **color** code (e.g., J 60 **MGS**).

10-foot (3.05 m) JOLLY Profiles – Textured Color-coated Aluminum			
Length = 3.05 m - 10'	Textured color-coated aluminum (TS)	Matte white (MBW)	Matte black (MGS)
H = mm - in.	Profile	Profile	Profile
6 - 1/4	J 60 + color* / 300	J 60 MBW / 300	J 60 MGS / 300
8 - 5/16	J 80 + color* / 300	J 80 MBW / 300	J 80 MGS / 300
10 - 3/8	J 100 + color* / 300	J 100 MBW / 300	J 100 MGS / 300
11 - 7/16	J 110 + color* / 300	J 110 MBW / 300	J 110 MGS / 300
12.5 - 1/2	J 125 + color* / 300	J 125 MBW / 300	J 125 MGS / 300

Accessories	Item No.
End cap, outside/inside corner ¹	EV / profile item number*
Connector	V / JPP4

¹2 corners/end caps and corner connector pins per order

How to order corners:
*To complete the item number for corners, add the corresponding **profile item number** (e.g., EV / J 80 **ATGB**).

Color-coated Aluminum

Length = 2.5 m - 8' 2-1/2"	Color-coated aluminum	
H = mm - in.	Profile	Outside corner
6 - 1/4	J 60 + color*	EV / J 60 + color*
8 - 5/16	J 80 + color*	EV / J 80 + color*
10 - 3/8	J 100 + color*	EV / J 100 + color*
11 - 7/16	J 110 + color*	EV / J 110 + color*
12.5 - 1/2	J 125 + color*	EV / J 125 + color*

***Color Codes**

* To complete the item number, add the **color** code (e.g., J 45 **G**).

Accessories	Item No.
End cap, outside/inside corner ¹	EV / profile item number*
Connector	V / JPP4

¹2 corners/end caps and corner connector pins per order

How to order corners:
*To complete the item number for corners, add the corresponding **profile item number** (e.g., EV / J 80 **ATGB**).