



ST. GERMAIN™

  
AMERICAN OLEAN™  






Photo features St. Germain Creme on the floor and Blanc, Creme and Chenille 1" x 2" mosaics on the wall.  
Cover photo features St. Germain in Chocolat 24" x 24".

# St. germain

STEPPING FROM THE PONT DE SULLY INTO  
PARIS' ST. GERMAIN TEXTILE DISTRICT,  
YOU'LL ENCOUNTER THE WARM, SUBTLE  
WOVEN PATTERNS THAT INSPIRED THIS  
RICH COLORBODY™ PORCELAIN.





# a textural sensation

Emulating the superb texture of the St. Germain district's fabrics, this tile is available in a tapestry of nine welcoming colors that also possess remarkably gentle linear undertones. This contemporary, high fashion tile has a unique capacity to complement many room accents thanks in part to its soft, comforting effect.


The sensation created by the simple open weave appearance is particularly well-suited to a variety of commercial applications, but the warm color palette and subtle linear graphic may also find a home in residential designs seeking to infuse a lush, atmospheric quality.



color  
options



WARMTH

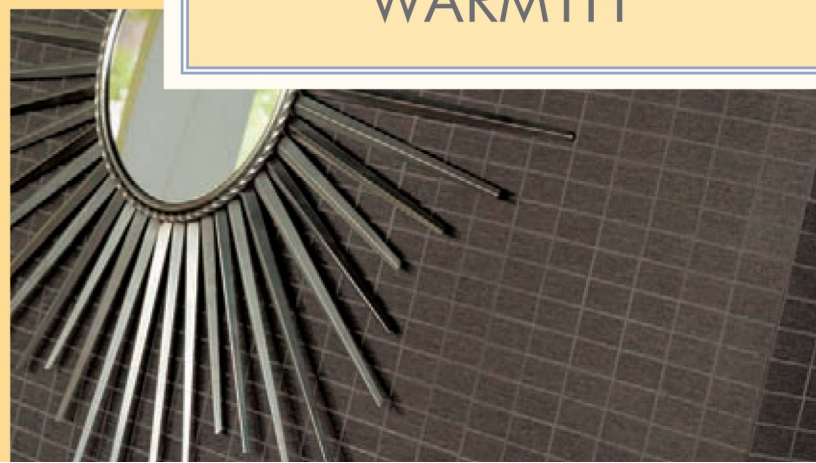





ENRICHING





# a wealth of possibilities

St. Germain's four field tile sizes and variety of unique shapes allow for a multitude of patterning options, and the nine rich hues make the application possibilities incredibly diverse. An especially welcome inclusion is a unique 6" x 24" rectangular tile that can be placed randomly or in a dramatic grid pattern. Perhaps you may find that a decorative accent like the 1" x 2" mosaic, mesh-mounted for easy installation could be just the right touch for your design.


Let your imagination hopscotch through a few possibilities. What rooms might call for a subtle linear effect? Or an inner warmth? Which of these effects would be just the touch to make an interior or exterior wall, floor or countertop that much more inviting?

All sizes are completely modular with a rectified Tru Edge™ and useful finishing touches. A bullnose, cove base and cove corner are available in each color to complete any application you desire.

Photos feature St. Germain Sauge 12" x 24" with Creme 1" x 2" mosaics on the floor and Creme 1" x 2" mosaics on the backsplash.



## FIELD TILE

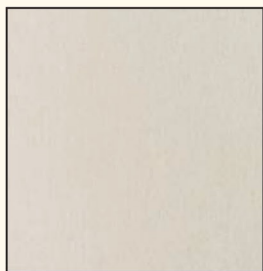


Blanc SE60



Creme SE61



Chenile SE62



Or SE63



Sable SE64



Chocolat SE65



Sauge SE66




Gris SE67




Noir SE68

## MOSAIC TILE




Blanc SE60




Creme SE61




Chenile SE62




Or SE63




Sable SE64



Chocolat SE65



Sauge SE66



Gris SE67




Noir SE68




COLOR




## SIZES

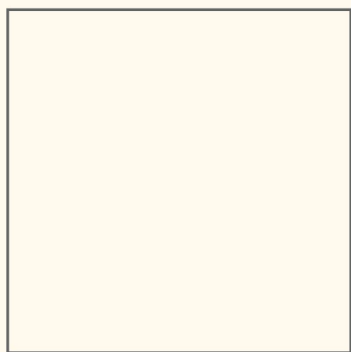


**24" x 24" Floor Field Tile**  
(24" x 24" nominal)  
(60.0 cm x 60.0 cm nominal)




**12" x 24" Floor Field Tile**  
(12" x 24" nominal)  
(30.0 cm x 60.0 cm nominal)



**12" x 12" Floor Field Tile**  
(12" x 12" nominal)  
(30.0 cm x 30.0 cm nominal)



**6" x 24" Floor Field Tile**  
(6" x 24" nominal)  
(15.0 cm x 60.0 cm nominal)



**1" x 2" Mosaic**  
(12" x 12" sheet nominal)  
(30.0 cm x 30.0 cm sheet nominal)

**Tile Thickness:** 3/8"

## SHADE VARIATION



Medium (V2)

## TRIM



**Bullnose S4369**  
3" x 12"



**Cove Base S36C9T**  
6" x 12"



**Cove Base Corner SC36C9T**  
1" x 6"





	TILE
C.O.F Wet	≥0.60
C.O.F Dry	≥0.70
Moisture Absorption	<0.5%
Breaking Strength	460 lbs.
MOH's	8
Chemical Resistance	Resistant

## APPLICATIONS

	Residential	Light Commercial	Commercial
Floors †	✓	✓	✓
Walls/Backsplashes	✓	✓	✓
Countertops	✓	✓	✓
Pool Linings (only in non-freezing climates)	✓	✓	✓

† Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection and proper maintenance.

For additional information, refer to "Factors to Consider" at [www.americanolean.com/ResidentialFactors](http://www.americanolean.com/ResidentialFactors)

- Suitable for exterior walls in freezing and non-freezing climates when proper installation methods are followed
- Not for use on ramps

## CLEANING PROCEDURES

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for ceramic tile
- Remove cleaning solution with a clean, damp sponge or mop

## INSTALLATION METHODS

### BACKING MATERIALS

- Concrete
- Mortar bed
- Cementitious backer board


## SETTING

- Latex modified thinset
- Epoxy

## GROUTING

- Sanded grout
- Sanded cement grout
- Epoxy grout
- Recommended grout joint :  $\frac{1}{16}$ ",  $\frac{1}{8}$ " when used in a modular pattern

**Note:** Since there are variations in all fired ceramic products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. For proper bonding, medium bed mortar should be utilized in installing tiles with a dimensional length size greater than 20" x 20", large rectangles or tiles with greater dimensional thickness than normal. Back buttering tiles of this nature in the installation process will also assure proper coverage for bonding.

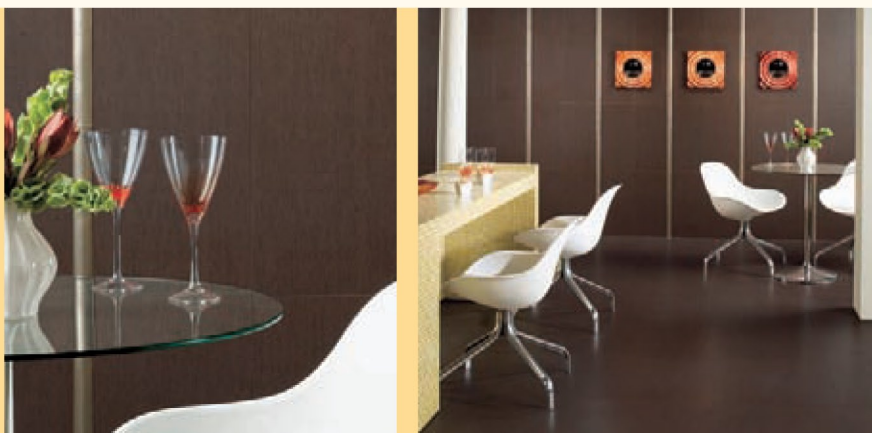

harmony



© 2008 American Olean  
[americanolean.com](http://americanolean.com)  
CSAOSTGER

