

GLAZED PORCELAIN & GLAZED WALL

FLORENTINE™

with REVEAL IMAGING™



 **daltile**[®]
DESIGN WITH CONFIDENCE™

INNOVATIVE
IDEAS FROM DALTILE

FLORENTINE™

with REVEAL IMAGING™

GLAZED PORCELAIN
& GLAZED WALL



floor • wall • countertop

The Luxurious Look of Natural Stone in a Sustainable Tile

Florentine from Daltile is for those who admire the elegance of marble and stone, but desire the durability and low-maintenance of ceramic tile. This timeless style mimics the unique tones of marble and stone with a color palette of crisp whites, neutral tans and fresh grays. Transform your area with the Florentine collection.



Variety of Natural Stone Visuals

Each color emulates a unique and striking replication of natural marble and stone with Reveal Imaging™

Glossy & Matte Tiles

High gloss wall tile and coordinating matte floor create dynamic visual appeal.

Low-Maintenance & Durability

Perfect for areas requiring low maintenance and durability in high traffic areas without sacrificing style.

Attractive Price Point

Cost-efficient alternative when compared to natural stone.

Photo features Nociolla in 12 x 24 on the floor, with an inset of Argento 12 x 24, Stone a la Mod Urban Bluestone mosaic as a border, and Imperial Stone Medallion in the center. Wall features Nociolla 12 x 24 in a brick-joint pattern with Argento 2 x 4 Brick-joint mosaic.

floor • wall • countertop

FLORENTINE™

with REVEAL IMAGING™

GLAZED PORCELAIN
& GLAZED WALL

Glazed Porcelain Floor Tile




CARRARA FL06



MARFIL FL07



ARGENTO FL08

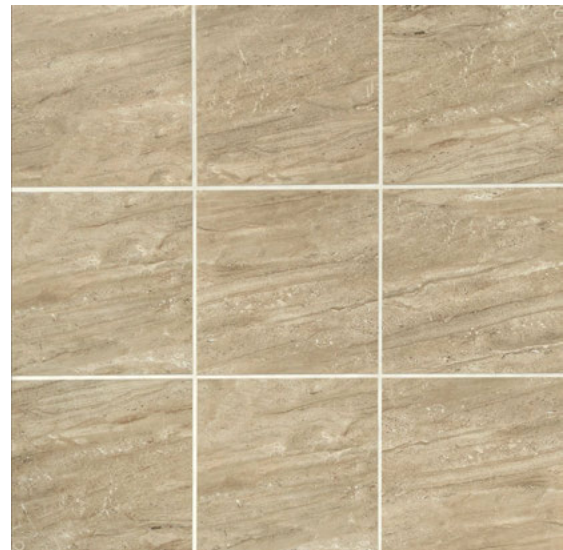

NOCIOLLA FL09

Glazed Porcelain Mosaics



CARRARA FL06
2 x 4 Brick-joint



MARFIL FL07
2 x 4 Brick-joint



ARGENTO FL08
2 x 4 Brick-joint



NOCIOLLA FL09
2 x 4 Brick-joint

Glazed Ceramic Wall Tile



CARRARA FL06



MARFIL FL07



ARGENTO FL08



NOCIOLLA FL09

CREATIVE IDEAS

Color



CARRARA



MARFIL



ARGENTO



NOCIOLLA

Accent




BRANCACCI
ARIA IVORY BC01
2 x 12 Arched Floral Listello



FASHION ACCENTS
BURNISHED HONED LIGHT FA09
2 x 12 Decorative Accent




FASHION ACCENTS
LATTICE F006
4 x 12 Decorative Accent



STONE RADIANCE
MUSHROOM/MORNING SUN
BLEND SA53 Random Mosaic

Backsplash Design Idea

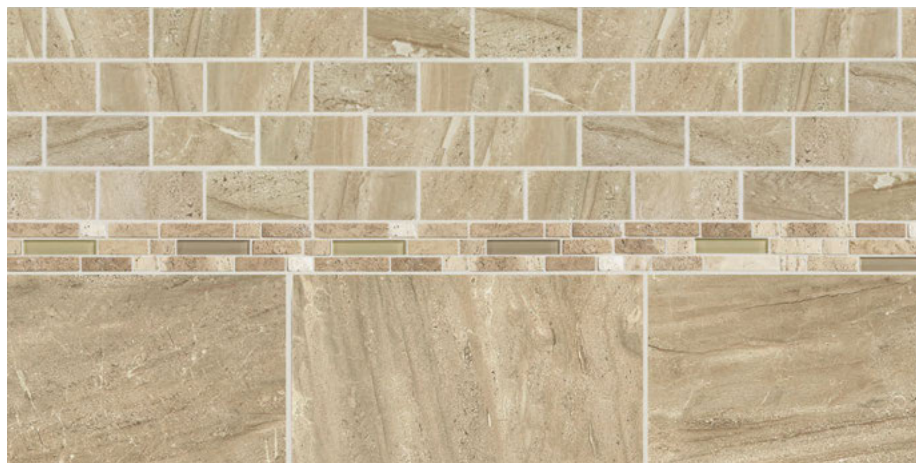

Backsplash features Nociolla 10 x 14 wall tile and 2 x 4 mosaic with Stone Radiance Mushroom/Morning Sun Blend 5/8 x Random Mosaic.

Pattern Ideas



BRICKWORK



BASKET WEAVE HORIZONTAL



CORRIDOR

FLORENTINE™

with REVEAL IMAGING™

GLAZED PORCELAIN & GLAZED WALL

SIZES

		SQ.FT. CARTON	PCS. PER CARTON
24 x 24 Floor Tile (Matte)	(23-7/16" x 23-7/16") (59.44 cm x 59.44 cm)	15.42	4
12 x 24 Floor Tile (Matte)	(11-5/8" x 23-7/16") (29.56 cm x 59.44 cm)	15.38	8
12 x 12 Floor Tile (Matte)	(11-1/2" x 11-1/2") (29.56 cm x 29.56 cm)	10.55	11
12 x 24 Wall Tile (Glossy)	(11-5/8" x 23-7/16") (29.56 cm x 59.44 cm)	11.64	6
10 x 14 Wall Tile (Glossy)	(9-27/32" x 13-3/4") (25.0 cm x 35.0 cm)	11.62	12
2 x 4 Brick-joint Mosaic (Matte)	(11-7/8" x 12-7/8") (30.2 cm x 32.6 cm)	10	12

RESIDENTIAL USAGE

FLOORS	WALLS	COUNTERTOPS	EXTERIOR PATIOS	EXTERIOR POOL DECKS
F*	W [▲]	C	EP	

* Floor tile only

▲ Wall tile suitable for exterior wall application in non-freezing climates only.

Only Floor tile is suitable for freezing and non-freezing climates when proper installation methods are followed.

COMMERCIAL USAGE

	INTERIOR			EXTERIOR [▲]	
	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL	RESIDENTIAL	COMMERCIAL
Floors/Patios*	✓	✓	✓	✓	
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking					
Pool Lining	✓	✓	✓	✓	✓

* Floor tile only

▲ Wall tile suitable for exterior wall application in non-freezing climates only.

Only Floor tile is suitable for freezing and non-freezing climates when proper installation methods are followed.

NOTES

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information, refer to "Factors to Consider" at <http://daltile.com/factors-to-consider.cfm>.

Since there is shade variation in all fired ceramic products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

TRIM

TYPE	NUMBER	SIZE	PCS. PER CARTON
Floor Bullnose (Matte)	S-43C9F	3 x 12	30
Wall Bullnose (Glossy)	S-43I0	3 x 10	30
Wall Bullnose (Glossy)	S-43C9W	3 x 12	30
Wall Bullnose (Glossy)	SN-43I0	3 x 3	30

SHADE VARIATION



HIGH (V3)

Color variation from tile to tile and within each tile.

INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION
3/8"	10 x 14 Wall: 1/16" 12 x 24 Wall, Floor and Mosaic: 1/8" (3/16" when rectangular sizes are used in a staggered brick-joint pattern. Overlap should not exceed 33%)

DYNAMIC C.O.F. (WET) : 2

The higher the rating, the higher the slip resistance.

1 < 0.42

2 ≥ 0.42 (Floor & Mosaic only)

DURABILITY : 3

Floor wear resistance

1 Residential Bathrooms

2 All Residential Areas

3 All Residential / Light Commercial

4 All Residential / Commercial

STATIC C.O.F. (WET) : 2

1 0.50 - 0.59

2 ≥ 0.60 (Floor & Mosaic only)

TEST RESULTS

	ASTM#	Floor & Mosaic Result (Matte Finish)	Wall Result (Glossy Finish)
Water Absorption	C373	< 0.5%	< 20.0%
Breaking Strength	C648	> 325 lbs.	100-230 lbs
Scratch Hardness	MOHS	8	4.0 – 6.5
Chemical Resistance	C650	Resistant	Resistant
Dynamic C.O.F.	A137.1	≥ 0.42	- -
Static C.O.F.	C1028	Wet: ≥ 0.60 Dry: ≥ 0.70	- -
Abrasion Resistance	C1027	3-4	- -

Dynamic C.O.F. (Wet) value as measured by the DCOF AcuTestSM helps to assess a product's suitability for a commercial environment. For more information, visit our website at www.daltile.com/DCOF.

FLORENTINE™

with REVEAL IMAGING™

GLAZED PORCELAIN
& GLAZED WALL



floor • wall • countertop



daltile
greenworks™
ENVIRONMENTAL LEADERSHIP THAT WORKS

By their very design, Daltile products can help make it easier for you to earn LEED™ points and/or points towards many industry leading green home building programs. From using recycled material content to establishing manufacturing facilities within 500 miles of your project, we help ensure you don't have to compromise your design to be environmentally conscious. For detailed information, visit daltilegreenworks.com.

CERTIFIED
PORCELAIN
TILE
0.5% or less water absorption



PRE CONSUMER
RECYCLED MATERIALS



REVEAL
IMAGING™



TRU-EDGE



daltile®

7834 C. F. Hawn Freeway | Dallas, TX 75217 | 214.398.1411 800.933.TILE
For more information about Daltile products and services, visit our website at daltile.com

©2013 Dal-Tile Corporation (9/13) SSDTFLORENI