


QUARRY TILE™

These unglazed quarry tiles are naturally stain- and slip-resistant, and are available with an abrasive grain for even greater traction.

Field tile



RED BLAZE 0Q40 (1)

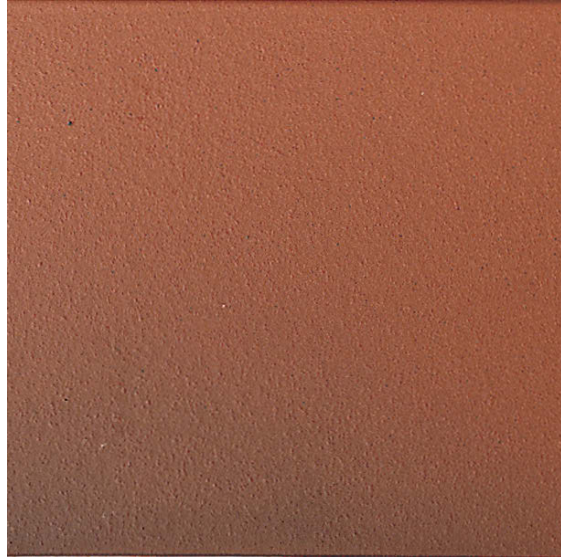

BLAZE FLASH 0Q41 (2)



ARID GRAY 0Q42 (2)



ARID FLASH 0Q48 (2)

(1), (2), (3) Indicate price groups, (1) being the least expensive
 All colors are available in abrasive grain 6 x 6.
 Only 0Q40 and 0Q41 are available in abrasive grain in 4 x 8.
 Double abrasive available on field tile in all colors on a special order basis.



SIZES

		SQ. FT. CARTON	PCS. PER CARTON
6 x 6 Field Tile	(6" x 6") (15.2 cm x 15.2 cm)	11.00	44
4 x 8 Field Tile*	(4" x 8") (10.2 cm x 20.3 cm)	10.76	50

* Available in Red Blaze 0Q41 and Red Blaze Flash 0Q41 only.

RESIDENTIAL USAGE

FLOORS	WALLS	COUNTERTOPS	EXTERIOR PATIOS	EXTERIOR POOL DECKS
F	W	C	EP	ED*

* Abrasive grain only.

COMMERCIAL USAGE

	INTERIOR			EXTERIOR	
	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL	RESIDENTIAL	COMMERCIAL
Floors/Patios	✓	✓	✓	✓	✓*
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking*	✓	✓	✓	✓	✓
Pool Linings	✓	✓	✓	✓	✓

Suitable for freezing and non-freezing climates when proper installation methods are followed. Suitable for industrial installations requiring high compressive strength.

*Abrasive grain only in non-freezing climates.

INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION
1/2"	3/8"

NOTES

We do not recommend light colored quarry tile in commercial kitchens unless properly sealed. It is necessary to follow the proper procedures and recommendations from the grout and maintenance products manufacturers.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the tile surface.

Suitable for use on ramps when ordered with abrasive.

Since there is shade variation in all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection.

For additional information, refer to "Factors to Consider" at <http://daltile.com/factors-to-consider.cfm>.

TRIM

TYPE	NUMBER	SIZE	PCS. PER CARTON
Bullnose	Q-1485*†	4 x 8	50
Bullnose Corner	QCR-L-1485*†	4 x 8	20
Bullnose	Q-1665*	6 x 6	44
Bullnose Corner	QCRL-1665*	6 x 6	44
Cove Base**	Q-3565^	5 x 6	44
Cove Base Corner	QCR-L-3565*^■	5 x 6	20
Cove Base Inside Corner	QB-3565^	1 x 5	25
Cove Base Outside Corner	QC-3565^	1 x 5	20

* Available in abrasive grain


** Cove Base trim is intended to coordinate with floor field tile in the standard 90-degree installation position.

† Available in colors 0Q40 and 0Q41 only

^ Not available in Flash colors; use coordinating solid

■ Special Order

SHADE VARIATION



DYNAMIC C.O.F. (WET) : 2

The higher the rating, the higher the slip resistance.

1 < 0.42

2 ≥ 0.42

STATIC C.O.F. (WET) : 2

1 0.50 - 0.59

2 ≥ 0.60

TEST RESULTS

	ASTM#	RESULT (Non-Abrasive Grain)	RESULT (Abrasive Grain)
Water Absorption	C373	< 3.0%	< 3.0%
Breaking Strength	C648	> 350 lbs	> 350 lbs
Scratch Hardness	MOHS	7.0	7.0
Chemical Resistance	C650	Resistant	--
Dynamic C.O.F.	A137.1	≥ 0.42	≥ 0.42
Static C.O.F.	C1028	Wet: ≥ 0.60 Dry: ≥ 0.80	Wet: ≥ 0.60 Dry: ≥ 0.90

Dynamic C.O.F. (Wet) value as measured by the DCOF AcuTest™ helps to assess a product's suitability for a commercial environment. For more information, visit our website at www.daltile.com/DCOF.



All or selected items within this series are made in the USA.
For more information visit www.daltile.com/QuarryTile

7834 C. F. Hawn Freeway | Dallas, TX 75217 | 214.398.1411 800.933.TILE
For more information about Daltile products and services, visit our website at daltile.com

