



FLOOR | WALL | MOSAIC

SKYBRIDGE™
GLAZED CERAMIC

 **daltile®**
IMAGINE WHAT'S POSSIBLE



Above and cover photos feature Gray 2 x 4 brick-joint mosaic and Gray 10 x 14 wall tile on the wall and Off White 18 x 18 floor tile on the floor.

Embrace the Urban Elegance of Skybridge™

Create a classic contemporary space with the brushed cement effect and clean edges of Skybridge. This stylish, modern take on the concrete trend is offered in four versatile colors. Its coordinating floor, wall and mosaic sizes will give your room a sleek, finished look.

- URBAN DESIGN
 - Designed with brushed cement effect and subtle linear visual
 - Clean, contemporary edges add to modern look
- VERSATILE APPEAL
 - Four color tone choices
 - Coordinating floor, wall and mosaic sizes help complete the design

 **POST CONSUMER RECYCLED MATERIALS**

 **PRE CONSUMER RECYCLED MATERIALS**

 **MADE IN THE U.S.A.**

 **REVEAL IMAGING™**

All or select items within this series are made in the USA. For more information, visit daltile.com/Skybridge.



FLOOR TILE



Off White SY95



Gray SY98



Beige SY96

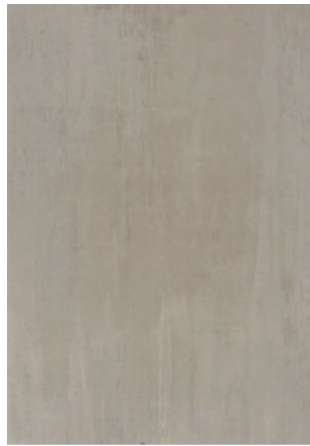


Brown SY97

WALL TILE



Off White SY95



Gray SY98



Beige SY96



Brown SY97

2 x 4 BRICK-JOINT MOSAICS



Off White SY95



Gray SY98



Beige SY96









Brown SY97

SKYBRIDGE™

GLAZED CERAMIC

SIZES

			Thickness	Sq. Ft. per Carton	Pieces Per Carton
	12 x 24 Floor Tile	(11-9/16" x 23-3/8") (29.40 cm x 59.30 cm)	3/8"	15.04	8
	18 x 18 Floor Tile	(17-1/2" x 17-1/2") (44.45 cm x 44.45 cm)	5/16"	17.04	8
	12 x 12 Floor Tile	(11-13/16" x 11-13/16") (30.00 cm x 30.00 cm)	5/16"	14.55	15
	10 x 14 Wall Tile	(9-13/16" x 13-15/16") (24.99 cm x 35.40 cm)	5/16"	14.25	15
	4 x 8 Wall Tile	(4-1/4" x 8-9/16") (10.88 cm x 21.82 cm)	5/16"	10.50	42
	2 x 4 Brick-Joint Mosaic	(12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)	1/4"	9.96	12

FLOOR APPLICATIONS

Floor Tile & Mosaics (excludes wall tile)*	Target DCOF wet	Tile Texture or Added Abrasive	Suitable
Dry & Level – Interior	N/A	N/A	✓
Wet & Level – Interior	≥ 0.42	Optional	✓
Commercial Dining Areas – Interior	≥ 0.50	Optional	
Pool Decking & other wet areas with minimal footwear	≥ 0.55	Required if tile size is > 3 x 3	
Covered Exterior	≥ 0.60	Required if tile size is > 3 x 3	
Interior Ramps, Incline and Uncovered Exterior	≥ 0.65	Required if tile size is > 6 x 6	

*Wall tile not suitable for floor use.

A DCOF value of ≥ 0.42 is the new standard for tiles specified for commercial application in standard A1371–2012, Section 9.6. It replaces the SCOF value of ≥ 0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest™, visit www.daltile.com/dcof.








OTHER APPLICATIONS

Floor Tile, Wall Tile & Mosaics	Suitable
Walls/Backsplashes	✓
Countertops (Floor tile & mosaics only)	✓*
Pool Linings (Floor tile & mosaics only)	✓*

Suitable for exterior applications in non-freezing climates only, when proper installation methods are followed.


*Wall tile not suitable for countertops or pool linings.

TRIM

	Type	Number	Size	Pieces Per Carton
	Floor Bullnose	P-43C9	3 x 12	30
	Wall Bullnose	S-4310 (10" Side)	3 x 10	54
	Wall Bullnose Corner	SN-4310	3 x 3	32
	Wall Bullnose	S-4849 (4" Side)	4 x 8	42
	Wall Bullnose	S-4489 (8" Side)	4 x 8	42
	Wall Bullnose Left Corner	SCL-4489	4 x 8	42
	Wall Bullnose Right Corner	SCR-4489	4 x 8	42

Floor bullnose trim is intended to coordinate with floor field tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
3/16" (Floor) (overlap should not exceed 33% when installing rectangular size in a staggered brick-joint pattern)	 Medium (V2)
1/16" (Wall)	
1/8" (Mosaics)	

TEST RESULTS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	3.0%-4.0%	< 20.0%	< 3.0%
Breaking Strength	C648	> 250 lbs.	120-230 lbs.	> 250 lbs.
Scratch Hardness	MOHS	7.0	4.0-6.0	8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant
Abrasion Resistance	C1027	3	N/A	4

For additional information, visit daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at daltile.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GET.DALTILE.COM



7834 C. F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE

©2015 Dal-Tile Corporation (3/15)