

COLORBODY™ PORCELAIN  
VALOR™



 **daltile**<sup>®</sup>  
DESIGN WITH CONFIDENCE™

# VALOR™ COLORBODY™ PORCELAIN




## TIMELESS LOOK WITH CONTEMPORARY EXPRESSION

A refined finish shown in a beautiful ColorBody™ porcelain and inspired by natural rustic stone. Valor portrays both classic elegance and a contemporary design that can transform any room. The neutral color palette and low-maintenance sensibility of Valor make this porcelain an outstanding choice for those wanting a look that will continue to please for years to come.

- **RUSTIC STONE LOOK & NEUTRAL COLORS**
  - Timeless designs and a neutral palette create a versatile look
- **VERSATILE SIZE OFFERING**
  - Flexible sizes suitable for both commercial and residential application
- **MAINTENANCE & DURABILITY**
  - Perfect for high traffic areas requiring low maintenance without sacrificing style
- **ATTRACTIVE PRICE POINT**
  - Cost-efficient alternative when compared to natural stone

## FINISH THE LOOK

Coordinate your design scheme with these decorative accents.

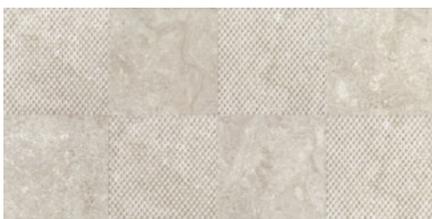

PARAMOUNT WHITE VR01 12 x 24



BUFF BEIGE VR02 12 x 24



GALLANT GRAY VR03 12 x 24

Above and cover photos feature Gallant Gray 24 x 24 field tile on the floor.

VALOR™  
COLORBODY™ PORCELAIN

FIELD TILE



PARAMOUNT WHITE VR01 - UNPOLISHED



PARAMOUNT WHITE VR01 - LIGHT POLISHED



BUFF BEIGE VR02 - UNPOLISHED



BUFF BEIGE VR02 - LIGHT POLISHED



GALLANT GRAY VR03 - UNPOLISHED



GALLANT GRAY VR03 - LIGHT POLISHED

# VALOR™ COLORBODY™ PORCELAIN



## SIZES

			SQ.FT. CARTON	PCS. PER CARTON
	18 x 36 Field Tile	(17-1/2" x 35-11/64") (44.5 cm x 89.32 cm)	8.72	2
	24 x 24 Field Tile	(23-3/8" x 23-3/8") (59.44 cm x 59.44 cm)	11.64	3
	12 x 24 Field Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	11.64	6
	12 x 24 Decorative Accent	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	--	4

## RESIDENTIAL USAGE

FLOORS	WALLS	COUNTERTOPS	EXTERIOR PATIOS	EXTERIOR POOL DECKS
<b>F</b>	<b>W</b>	<b>C</b>	<b>EP</b>	

Floor tile is suitable for residential exterior walls in freezing and non-freezing climates when proper installation methods are followed. Wall tile is suitable for exterior walls in non-freezing climates only.

## COMMERCIAL USAGE

	INTERIOR			EXTERIOR	
	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL	RESIDENTIAL	COMMERCIAL
Floors/Patios	✓	✓	✓	✓*	
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking					
Pool Linings	✓	✓	✓	✓	✓

Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

\*Unpolished surface

## NOTES

Strong random shading enhances the beauty of this product. To achieve optimal results, tile should be selected from multiple cartons and shading arrangement planned prior to installation.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Special consideration needs to be given when installing tiles 20" and larger. Please refer to [www.daltile.com/LargeTiles](http://www.daltile.com/LargeTiles) for more information.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at: <http://daltile.com/CommercialFactors> or <http://daltile.com/ResidentialFactors>

## TRIM

TYPE	NUMBER	SIZE	PCS. PER CARTON
Floor Bullnose	S-43C9	3 x 12	30
Cove Base	P-36C9T	6 x 12	22
Cove Corner	PC-36C9T	1 x 6	15

Cove Base and Floor Bullnose trim is intended to coordinate with floor field tile in the standard 90-degree installation position.

## SHADE VARIATION



## INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION
3/8" (24 x 24, 12 x 24) 7/16" (18 x 36)	1/8" (3/16" when a rectangular size is used in a staggered brick-joint pattern, overlap not to exceed 33%, as well as when multiple sizes are installed in a modular pattern)

## TEST RESULTS

	ASTM#	UNPOLISHED RESULT
Water Absorption	C373	< .05%
Breaking Strength	C648	> 450 lbs.
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Dynamic C.O.F.	A137.1	Unpolished: ≥ 0.42 Light Polished: < 0.42

A DCOF value of ≥ 0.42 is the new standard for tiles specified for commercial application in standard A137.1-2012, Section 9.6. It replaces the SCOF value of ≥ 0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest™ please visit <http://daltile.com/information/DCOF>.



DESIGN WITH CONFIDENCE™