



**DESIGN**

Product Type:	Floating LVT
Gauge:	4.5mm
Wear Layer:	20 mil (0.5mm)
Finish:	M-Force Enhanced Urethane
Size:	5.84"W x 47.8"L
Anti-Microbial:	No
Installation:	Floating LVT with Uniclic Locking System
Square Feet Per Carton:	19.39 sf/ctn
Pieces Per Carton:	60 cartons/pallet
Pounds per carton:	30.6 lbs/ctn
Underlayment:	Mohawk ActiveSound™ (Optional)

**PERFORMANCE**


Construction:	Commercial grade luxury vinyl tile
Classification:	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Smoke Density:	ASTM E662 Part A - Passes - < 450
Squareness:	ASTM F2055 - Passes - 0.010 in. max
Size and Tolerance:	ASTM F2055 - Passes - ±0.016 in. per linear foot
Dimensional Stability:	ASTM F2199 - Passes - ≤ 0.020 in. per linear foot
Thickness:	ASTM F386 - Passes - As Specified ±0.005 in.
Flexibility:	ASTM F137 - Passes - ≤ 1.0 in., no cracks or breaks
Static Load:	ASTM F970 - Passes, modified - 1000 psi
Residual Indentation:	ASTM F1914 - Passes - Average less than 8%
Slip Resistance:	ASTM C1028 - Passes ≥ 0.5
Resistance To Chemicals:	ASTM F925 - Passes - No Change
Resistance To Heat:	ASTM F1514 - Passes - ΔE ≤ 8
Resistance To Light:	ASTM F1515 - Passes - ΔE ≤ 8
Critical Radiant Flux:	ASTM E648 - Passes - ≥ 0.45 watts/cm2, Class 1

**SUSTAINABILITY**

Certification:	FloorScore® Certificate
----------------	-------------------------

**SERVICE**

Warranties:	Limited 10 Year Commercial
-------------	----------------------------

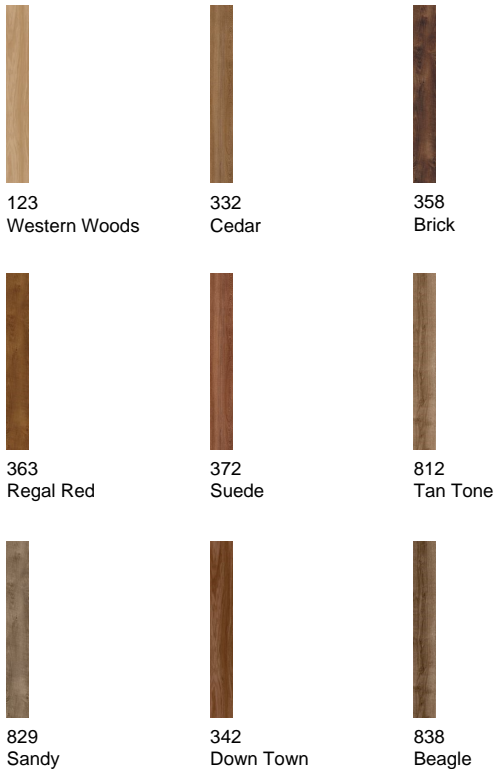

Living Local Collection



851  
Too Tan



918  
Silver



938  
Pigeon



949  
Gorgeous Gray



958  
Two Tone



966  
Shadow



989  
Lead



141  
Gold



142  
Sable