



# Matuto

Global Entry Collection




## Let Your Creativity Fly with Matuto


Named for the Filipino word “teacher,” Matuto offers a stylish, cost-effective alternative to VCT. The modern 12” x 24” format catches attention in a full range of neutrals and energizing brights. Protected by our durable, wax-free M-Force™ Urethane coating, Matuto lets creativity reign even in the toughest environments.

### High Performance Resilient Tile

**Construction:** Global Entry tiles feature a 20 mil commercial wear layer and are coated with M-Force™ Ceramic-Enhanced Urethane, which is polish-optional for versatile, cost-effective maintenance.

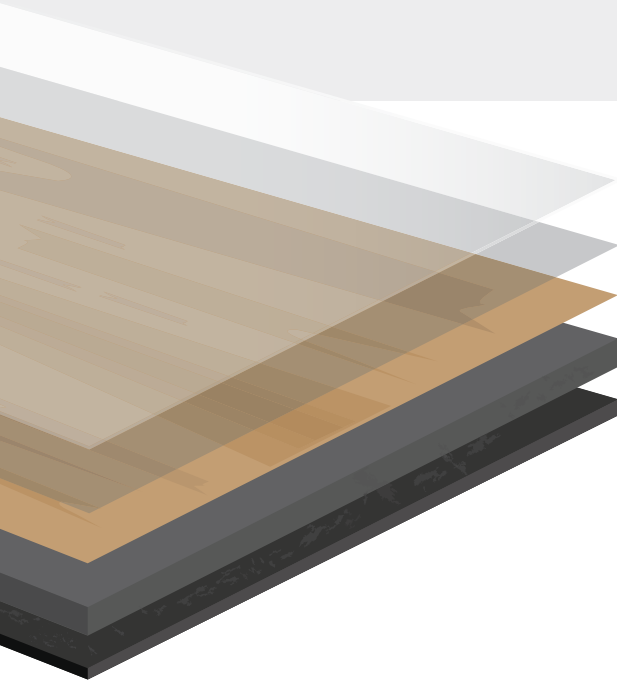

- M-Force™ Ceramic-Enhanced Urethane Finish
- Heavy Commercial Wear Layer
- Decorative Print Film
- Commercial Base
- Stabilizing Back Layer

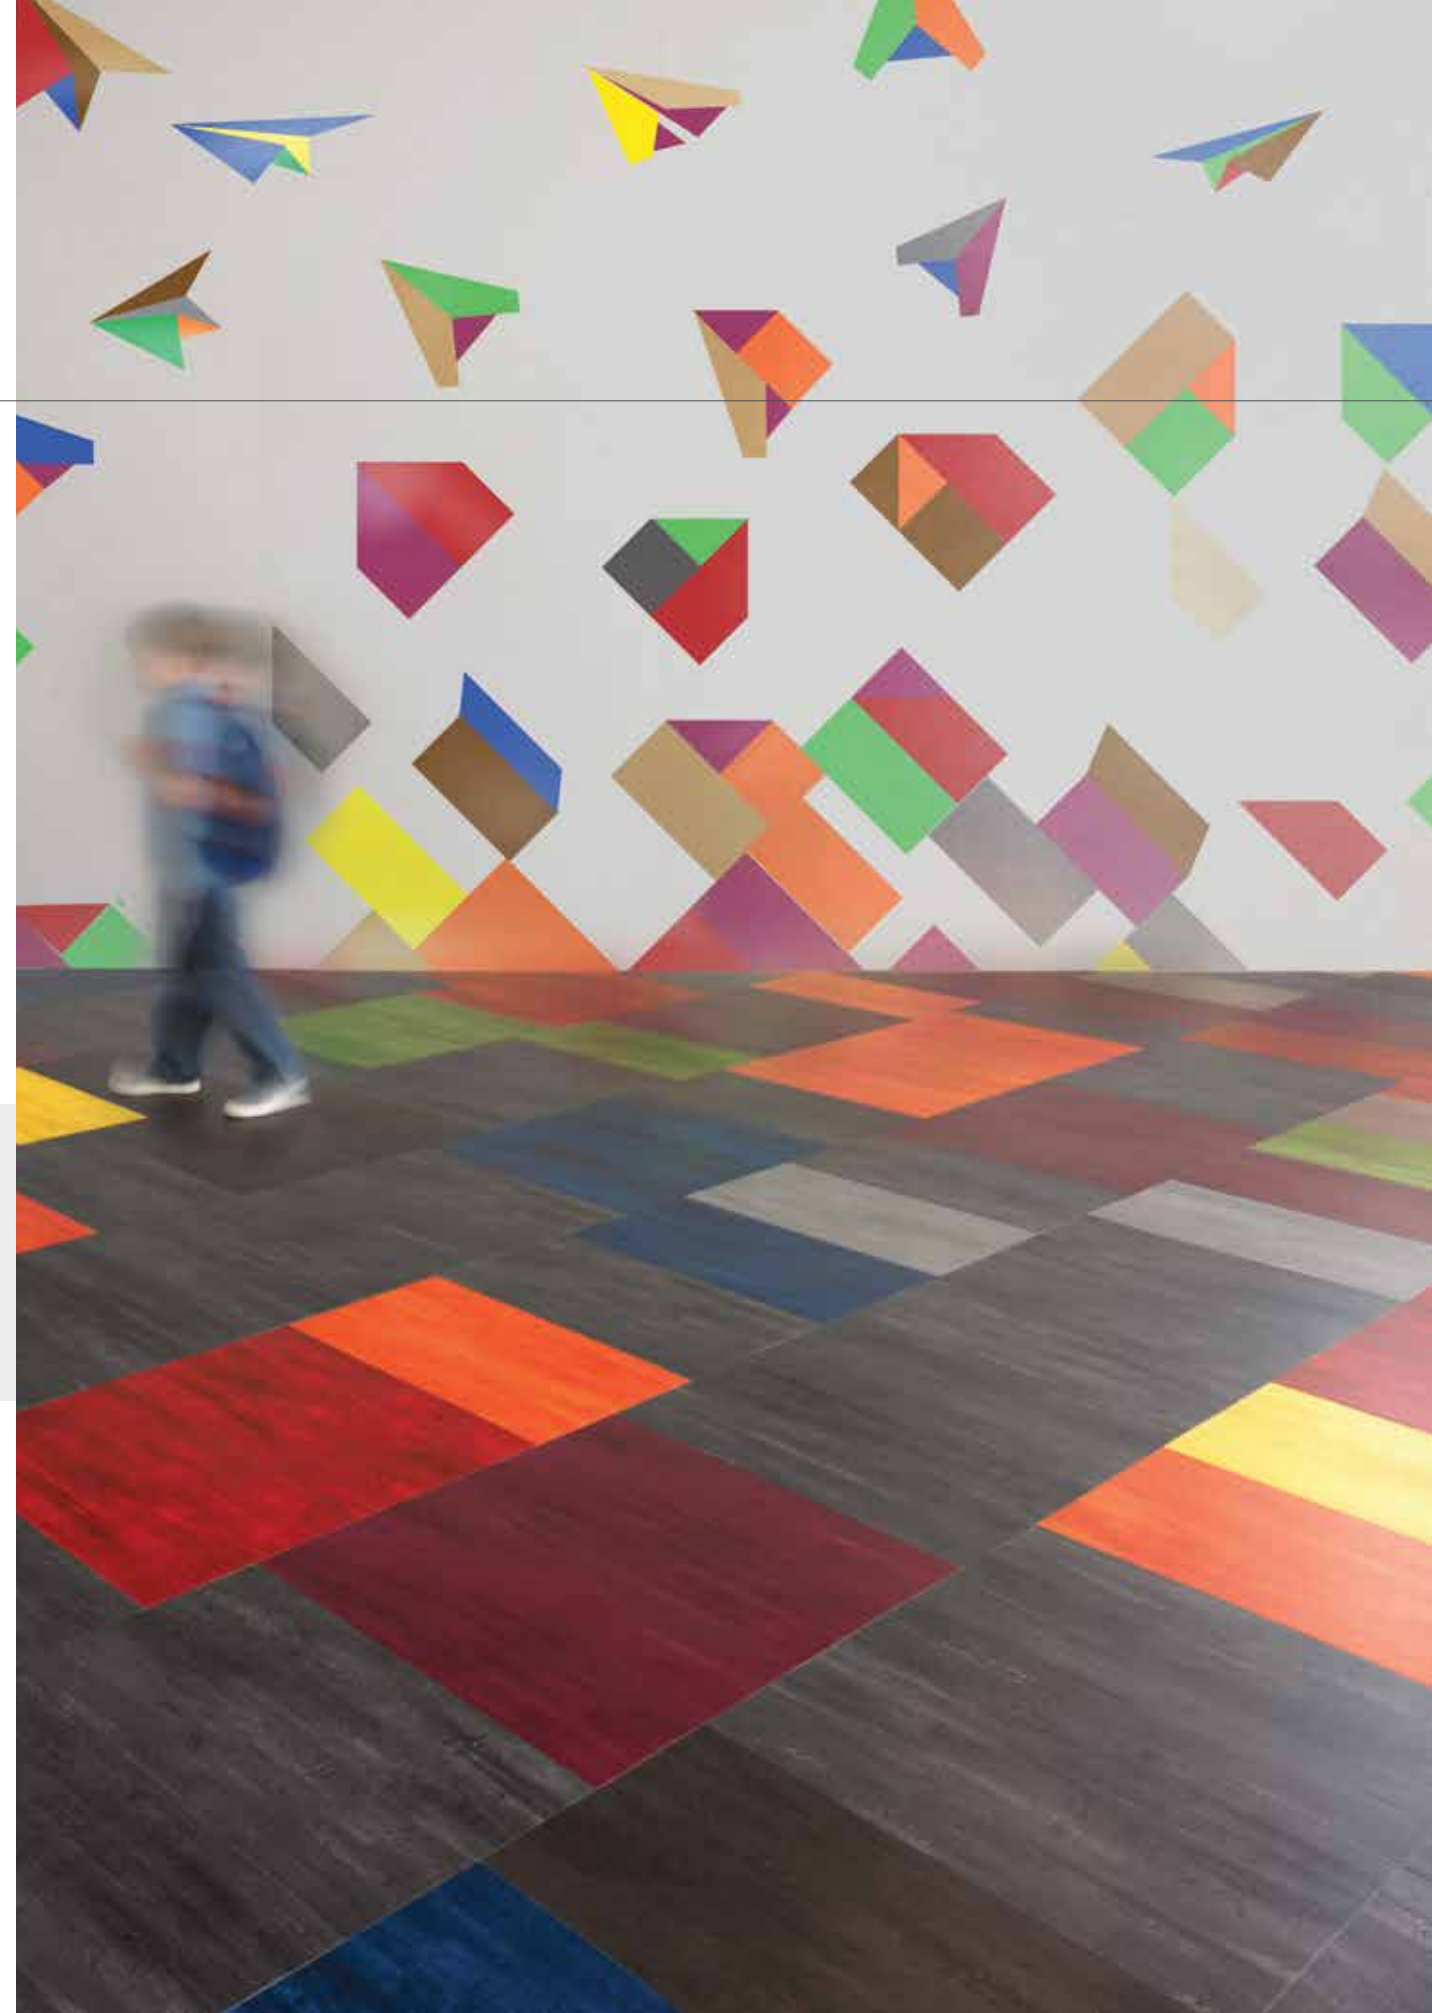



## Teamwork

Colorlines link to our most popular yarns, including direct crossovers to Color Beat Carpet Tile.



## Integrated Design

Matuto's color line is based on our Yarn Bank, ensuring colors work well with our most popular carpet styles. Mohawk Group offers a full range of commercial flooring solutions, so we can recommend the option that is the most appropriate for the application.


## Limitless Applications

*Durable construction combines with low-maintenance finish for practical, cost-effective flooring solutions. Appropriate for heavy commercial traffic, including applications in the following areas:*

- **Education** – university centers, corridors, offices, cafeterias and classrooms
- **Healthcare** – non-aseptic areas of hospitals, senior living and medical office buildings
- **Retail** – high-traffic stores
- **Hospitality** – public space, back-of-house areas
- **Corporate** – lobbies, corridors and break rooms

## Reduced Life Cycle Cost

Cumulative Cost per Square Foot by Year  
Resilient Tile vs. VCT

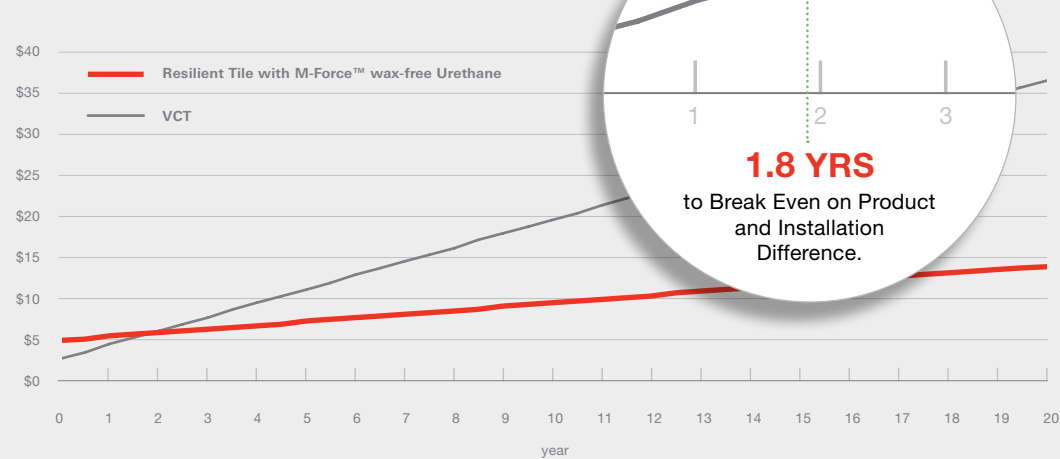

Global Entry products with M-Force™ Urethane do not require polishes or waxes, which equates to a significant cost savings over VCT. The payback occurs in as little as 2 years and compounds exponentially over the life of the installation.

\* Tiles can be polished if preferred by the end user.

### Selling Features

- Mix neutrals and brights to create accent areas
- Organic, watercolor visual creates movement and hides wear
- Designed alongside carpet color lines for easy coordination
- 20 mil wear layer and M-Force™ Ceramic-Enhanced Urethane finish
- Polish-free maintenance saves occupied costs
- FloorScore® Certified

### Installation Methods

12" x 24" format works in a variety of installation methods

- Monolithic
- Herringbone
- Half-Lap
- Brick Ashlar
- Random
- Mixed
- Plank Half-Lap
- Basket Weave

## Specifications

Style Name  
Collection Name  
Style Number  
Brand  
Product Type

Matuto  
Global Entry  
C0008  
Mohawk Group - Hard Surface  
Commercial Grade Resilient Tile



### DESIGN

Overall Gauge  
Wear Layer  
Finish  
Colors Available / Size  
Packaging  
Installation  
Recommended Adhesive

.10" (2.5mm)  
20 mil (.5mm)  
M-Force™ Ceramic Enhanced Urethane  
15  
36 sf/ct (3.34 m²/ctn); 18 pcs/ctn, 34.03 lbs/ctn (15.43 kg/ctn)  
Glue Down  
M950 Acrylic, MS160 Spray or M700 PSA



### PERFORMANCE

Construction  
Classification  
Squareness  
Size and Tolerance  
  
Thickness  
Dimensional Stability  
  
Static Load Limit  
Residual Indentation  
Slip Resistance  
Resistance to Chemicals  
Resistance to Light  
Resistance to Heat  
Critical Radiant Flux  
Smoke Density

Commercial grade luxury vinyl tile  
ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed  
ASTM F2055 - Passes - Maximum 0.010"  
ASTM F2055 - Passes - Width: 304.8mm±0.40mm;  
Length: 609.6mm±0.8mm  
ASTM F386 - Passes - As specified 2.5mm±0.13mm  
ASTM F1237 - Passes - Controlled within Width +/- 0.005":  
304.8mm±0.39mm, Length: 609.6mm±0.8mm  
ASTM F970 (modified) - 1500 psi  
ASTM F1914 - Passes - Average less than 8% Passes  
ASTM F925 - Passes - No Change or Slight Change  
ASTM F1515 - Passes - Less than 8 ave., max  
ASTM F1514 - Passes - Less than 8 ave., max  
ASTM E648 - Passes - ≥.45 watts/cm², Class 1  
ASTM E662 - Passes



### SUSTAINABILITY

Certification

FloorScore® Certified



### SERVICE

Warranty

Commercial Limited 10 Year

