

GLAZED CERAMIC WALL

COMPOSITION™



 **dalTile**®

DESIGN WITH CONFIDENCE™

COMPOSITION™

GLAZED CERAMIC WALL



GRAND SIZE FOR STUNNING WALL LOOKS

Change your walls and watch your entire room transform with Composition tile. The matte and glossy neutral colors attract architects, designers, builders and homeowners alike. The large and rectangular size creates grand statements and impressive accent walls. Unique Visionary color offers a crisp graphic and wide pattern variety, while a sleek trim package completes the look. Installation is a breeze with Tru-Edge formatting and maintenance could not be easier. With Composition wall tile, the options are endless.

LARGE FORMAT WALL TILE

Create a contemporary space with large 12 x 24 wall tile and TruEdge (rectified) for ease of installation and a sleek, seamless look.

MINIMAL UPKEEP

Durable and low-maintenance.

NEUTRAL SHADES

Select from neutral color palettes that complement an array of styles.

PERFECT FINISH

Choose from glossy or matte finishes for a stylized look.

FINISH THE LOOK

Coordinate your design scheme with some of our top complimentary colors.

COLOR	 VISIONARY GLOSS	 GESSO	 CANVAS
ACCENT	 COLORWAVE SOFT CASHMERE CW23 1 x 1	 MARVEL RADIANCE MV30 5/8 x 5/8	 GLASS HORIZONS PACIFIC BLEND GH14 3/4 x Random Linear Mosaic


COMPOSITION™

GLAZED CERAMIC WALL

FIELD TILE



VISIONARY GLOSS CP05

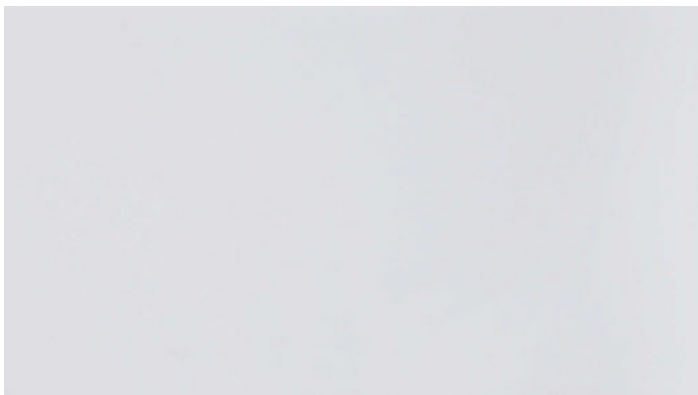

GESSO GLOSS CP01 / GESSO MATTE CP02



CANVAS GLOSS CP03 / CANVAS MATTE CP04

COMPOSITION™

GLAZED CERAMIC WALL



SIZES

		SQ.FT. CARTON	PIECES PER CARTON
12 x 24 Wall Tile	(12" x 24") (30.0 cm x 60.0 cm)	11.64	6

RESIDENTIAL USAGE

FLOORS	WALLS	COUNTERTOPS	EXTERIOR PATIOS	EXTERIOR POOL DECKS

COMMERCIAL USAGE

	INTERIOR			EXTERIOR	
	LIGHT RESIDENTIAL	COMMERCIAL	COMMERCIAL	RESIDENTIAL	COMMERCIAL
Floors/Patios					
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking					
Pool Linings	✓	✓	✓	✓	✓

Wall tile is suitable for exterior walls in non-freezing climates only.

NOTES

Use of a latex modified thin-set is recommended for proper installation. Special care needs to be given when installing tiles 20" and larger. Please refer to www.daltileproducts.com/LargeTiles for information. Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A 1371.1 standards. For additional information, refer to "Factors to Consider" at www.daltile.com/CommercialFactors.




By their very design, DalTile products can help make it easier for you to earn LEED™ points and/or points towards many industry leading green home building programs. From using recycled material content to establishing manufacturing facilities within 500 miles of your project, we help ensure you don't have to compromise your design to be environmentally conscious. For detailed information, visit daltilegreenworks.com.

TRIM

TYPE	NUMBER	SIZE	PCS. PER CARTON
Surface Bullnose	S-43C9	3 x 12	30
Surface Bullnose Corner	SN-4310	3 x 3	30

SHADE VARIATION



INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION
3/8"	1/16" (3/16" when used in a staggered brick-joint pattern, overlap not to exceed 33%)

TEST RESULTS

	ASTM#	RESULT
Water Absorption	C373	< 20.0%
Breaking Strength	C648	100 - 230 lbs
Scratch Hardness	MOHS	4.0 - 6.0
Chemical Resistance	C650	Resistant
Coefficient of Friction	C1028	--



DESIGN WITH CONFIDENCE™

7834 C. F. Hawn Freeway | Dallas, TX 75217 | 214.398.1411 800.933.TILE
For more information about DalTile products and services, visit our website at DALTILE.COM.
© 2013 Dal-Tile Corporation (10/13).