




(san savino™)

glazed porcelain stoneware | 3D printing technique

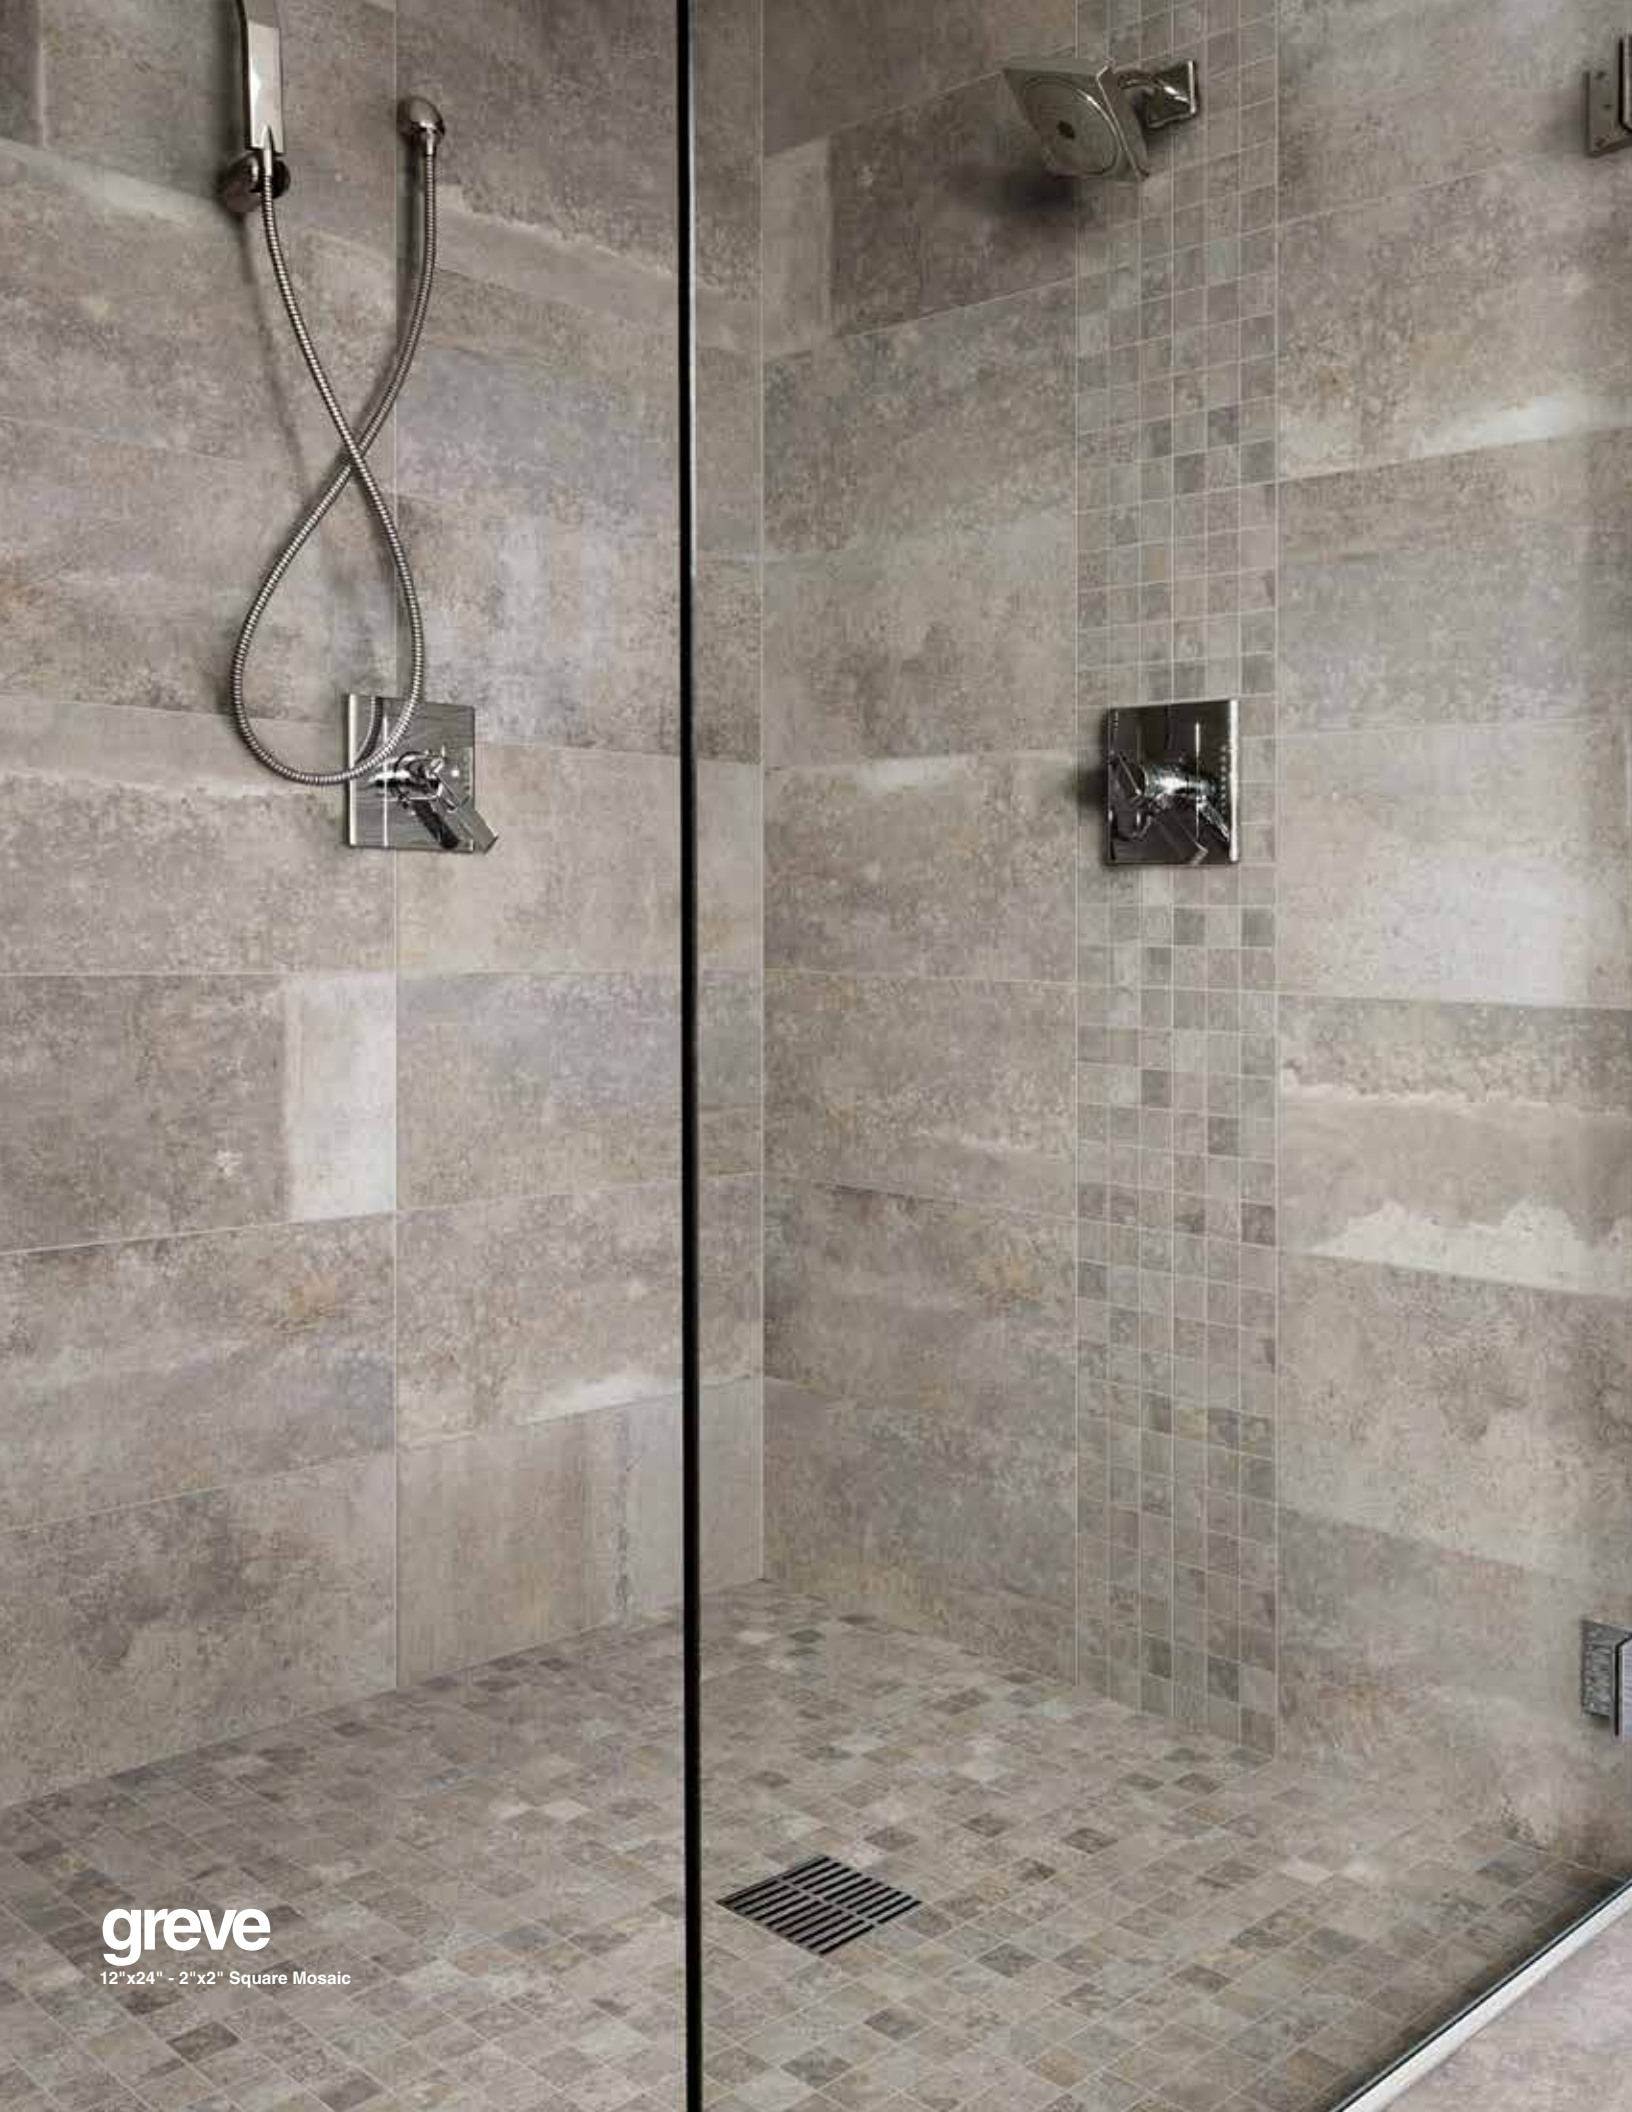

greve

12"x24" - 2"x2" Square Mosaic



San Savino – another phenom porcelain by Marazzi USA – elevates the timeworn character of old world rustic concrete to a place of prestige in modern, urban settings. Dramatic shade gamuts and worn, gentled edges combine with the authentic distress of stains and water discolorations, creating robust counterpoint for contemporary furnishings and spaces.



No longer just an industrial product, concrete items are currently impacting interior/exterior landscapes in varied ways. With San Savino, many attributes of the porcelain rendition surpass the inspiration material. Create the on-trend impression of concrete without the challenges. Installation on floors, walls, and countertops (both indoors and out) is simpler; no sealing or coloring is required; weight loads are less; lower porosity challenges allergen and mold formation.



pienza
20"x20"



Big, bold planks and squares in 12"x24", 18"x36" and 20"x20" formats leverage three dynamic natural shade ranges of beige, charcoal and grey to recreate authentic concrete colorplays and patterns. The direction rests in your hands. Begin the self-expression inside the home and transition to outdoor living areas or begin with exterior walkways and gathering spots, then move indoors to hospitality venues. Mesh-mounted 2"x2" mosaics lend additional design opportunity and flair since they can be used as full 12"x12" sheets or cut into smaller squares or strips. Add the perfect finishing touch to any installation with bullnose, cove base and out angle trims.

greve
20"x20"

(san savino™)



ULPF Greve
18"x36"



ULPC Greve
20"x20"



ULP9 Greve
12"x24"



ULPG Pienza
18"x36"



ULPD Pienza
20"x20"



ULPA Pienza
12"x24"

Decos



ULPJ Greve
Mosaic - Square 2"x2"
12"x12"



ULPK Pienza
Mosaic - Square 2"x2"
12"x12"

Trims



ULPM Greve
Bullnose
3"x12"



ULPQ Greve
Cove Base
6"x12"



ULPT Greve
Cove Base Out Angle
1"x6"



ULPN Pienza
Bullnose
3"x12"



ULPR Pienza
Cove Base
6"x12"



ULPU Pienza
Cove Base Out Angle
1"x6"

technical

ASTM Test Results

Technical Characteristics	ASTM Standards	ASTM Test Results	ASTM Test Methods
Water Absorption	≤ 0.50%	≤ 0.50%	C373
Frost Resistance	As Reported	Resistant	C1026
Scratch Resistance	MOHS 1-10	7.5	MOHS Scale
Breaking Strength	≥ 250 lbf.	≥ 722 lbf.	C648
Facial Dimension	+/-3.0% From Nominal	Within Standard	C499
Thickness	≤ 0.04 in (1.02 mm max)	Within Standard	C499
Wedging (squareness)	+/- 0.50% or +/- 2.0 mm**	Within Standard	C502
Warpage (flatness)	+/- 0.75% or +/- 2.3 mm**	Within Standard	C485
Abrasion Resistance	Class 0 - Class V	Class IV	C1027
DCOF-Dynamic Coefficient of Friction (Wet Areas Only) [†]	As Reported	Minimum 0.42	DCOF AcuTest SM **
Chemical Resistance	Class A - Class E	Class A	C650
Stain Resistance	Class A - Class E	Class A	C1378

[†]Dynamic Coefficient of Friction (DCOF) - Water, oil, grease or other fluids create slippery conditions. When installing floors in areas with exposure to these conditions, a minimum D.C.O.F. value of 0.42 is required. Additionally, extra caution is required with regards to product selection and proper maintenance. Visit www.tcnatile.com for complete information regarding the DCOF AcuTest test method and values.

^{**}DCOF AcuTest is the industry designation for the test procedure contained in ANSI A137.1 Section 9.6, which has been extensively researched, allows for in-situ field measurements, and is in use at tile manufacturing facilities. It was so named to distinguish it from other DCOF measurements using different instruments and/or protocols.

** Whichever is less

Floor Tile

Wall Tile

3d Printing Technique

Decorative Tile

Trim Available

Suitable for Outdoors

Substantial Variation

Frost Resistant

Abrasion Resistance

D.C.O.F. (Wet Areas)
(Minimum 0.42)

21% Minimum Pre-Consumer
Recycled Content

No VOC

made in the
USA



Contributes to
LEED Credits



ULPH Volterra
18"x36"



ULPE Volterra
20"x20"



ULPB Volterra
12"x24"



ULPL Volterra
Mosaic - Square 2"x2"
12"x12"



ULPP Volterra
Bullnose
3"x12"





ULPS Volterra
Cove Base
6"x12"



ULPV Volterra
Cove Base Out Angle
1"x6"

packaging

	Sizes	Pcs	Sq. Ft.	Weight (lbs.)	Thickness
Floor Tile	12"x24"	6	11.63	57	0.394
Floor Tile	20"x20"	6	16.15	79	0.394
Floor Tile	18"x36"	3	13.44	63	0.394
Mosaic - Square 2"x2"	12"x12"	10		39	Compatible
Cove Base	6"x12"	12		26	Compatible
Cove Base Out Angle	1"x6"	6		1	Compatible
Bullnose	3"x12"	20		21	Compatible

	Sizes	Ctn	Sq. Ft.	Weight (lbs.)
Floor Tile	12"x24"	40	465.20	2324
Floor Tile	20"x20"	24	387.60	1896
Floor Tile	18"x36"	33	443.52	2134



American Marazzi Tile, Inc.
Headquarters & Manufacturing Plant

359 Clay Road East
Sunnyvale, Texas 75182

T 972.226.0110
F 972.226.5629
www.marazzitile.com
contact@marazzitile.com



Color and other aesthetic features shown are as close as the limitation of the printing process will allow. We have tried to make this brochure as comprehensive and factual as possible. We reserve the right, however, to make changes at any time, without notice, in colors, materials, packaging, specifications and availability. Since some information may have been updated since time of printing, please check with American Marazzi Tile Customer Service for details.